

FARO



DOWN LIGHT •
SPOT •
CEILING LIGHT •
STEP LIGHT •
MG. MS LIGHT •

CONTENTS

DOWN LIGHT

KOBE 코비 14P



JORDAN 조던 22P



EMBIID 엠비드 30P



HARDEN 하든 38P



MORANT 모란트 46P



JAMES 제임스 54P



TATUM 테이텀 18P



JOKIC 요키치 26P



RODMAN 로드맨 34P



LILLARD 릴라드 42P



DURANT 듀란트 50P



PIPPEN 피펜 58P



CONTENTS

DOWN LIGHT

WADE 웨이드 62P



DONCIC 돈치치 70P



LAVINE 라빈 78P



BUTLER 버틀러 78P



TOMPSON 탐슨 66P



CURRY 커리 74P



GIANNIS 야니스 80P



MITCHELL 미첼 80P



IRVING 어빙 82P



BOOKER 부커 88P



IVERSON 아이버슨 92P



CONTENTS

DOWN LIGHT • CEILING LIGHT • SPOT

BARKLEY 바클리 98P



BARKLEY 바클리 102P



LEONARD 레너드 104P



SMOLTZ 스몰츠 112P



BERRA 베라 116P



MADDUX 매덕스 118P



RIVERA 리베라 120P



JETER 지터 124P



ROBINSON 로빈슨 126P



SCHILLING 실링 130P



KERSHAW 커쇼 134P



CY YOUNG 사이영 138P



NIEKRO 니크로 142P



BUMGARNER 범가너 146P



CONTENTS

STEP LIGHT • PENDANT • CEILING LIGHT • DOWN LIGHT

TY COBB 타이콧 151P



TY COBB 타이콧 153P



MG_01 마그넷 156P



MG_02 마그넷 157P



MG_03 마그넷 158P



MG_04 마그넷 159P




MG_05 마그넷 160P



MS_01 마그넷 162P



MS_02 마그넷 164P

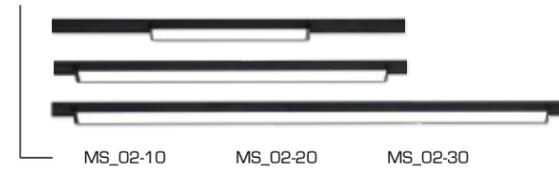

MS_03 마그넷 165P



MS_04 마그넷 166P



MS_05 마그넷 167P



MS_06 마그넷 167P




ART MUSSEUM

MULTI DOWN LIGHT


DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.





ART MUSSEUM
MULTI DOWN LIGHT



DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.







COFFEE SHOP
MULTI DOWN LIGHT

DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.

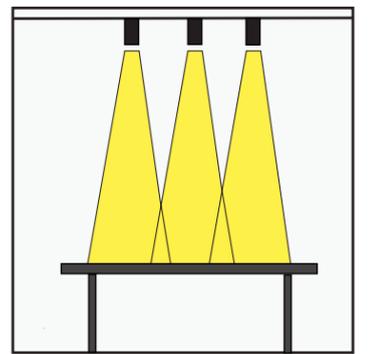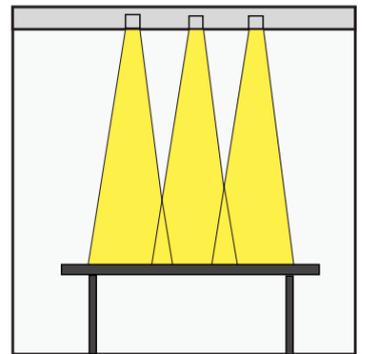



KOBE

KB-C-7060-08 / KB-C-8575-15 / KB-C-9585-20
DOWN LIGHT



KOBE 코비 DOWN LIGHT



KOBE · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Kobe 코비

DOWN LIGHT

KB-C-7060-08/KB-C-8575-15/KB-C-9585-20



KB-C-7060-08


KB-C-8575-15

KB-C-9585-20




PRODUCT BASIC OPTIONS


Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø70×H65
Power : 8W
Input Voltage : 220V



Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H75
Power : 5W
Input Voltage : 220V



Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø95×H90
Power : 20W
Input Voltage : 220V




Kobe DOWN LIGHT

PRODUCT BASIC OPTIONS

KOBE_ KB-C-7060-08 8W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	64.64	3000K	559lm			
8W	76.13	4000K	621lm	Ø60	15°, 24°, 36°, 60°	Ra90↑
	74.16	5000K	621lm			



	Lux in center	Beam width
2M	149 lux	1.83m
4M	37 lux	3.66m
6M	16 lux	5.49m
8M	9 lux	7.32m
10M	5 lux	9.15m

KOBE_ KB-C-8575-15 15W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	65.47	3000K	972lm			
15W	73.93	4000K	1072lm	Ø75	15°, 24°, 36°, 60°	Ra90↑
	73.29	5000K	1052lm			



	Lux in center	Beam width
2M	349 lux	1.39m
4M	87 lux	2.78m
6M	38 lux	4.18m
8M	21 lux	5.57m
10M	13 lux	6.96m


KOBE_ KB-C-9585-20 20W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	70.74	3000K	1472lm			
20W	78.79	4000K	1532lm	Ø85	15°, 24°, 36°, 60°	Ra90↑
	77.01	5000K	1539lm			



	Lux in center	Beam width
2M	344 lux	1.91m
4M	86 lux	3.83m
6M	38 lux	5.74m
8M	21 lux	7.66m
10M	13 lux	9.58m

BEAM ANGLE INFO



TATUM

JT-C-6550-08 / JT-C-8575-15
DOWN LIGHT



TATUM 테이텀 DOWN LIGHT

TATUM · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.



Tatum 테이텀

DOWN LIGHT / 리플렉터 교체 가능

JT-C-6550-08 / JT-C-8575-15



JT-C-6550-08



JT-C-8575-15



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø65×H65
Power : 8W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H80
Power : 15W
Input Voltage : 220V




Tatum DOWN LIGHT

PRODUCT BASIC OPTIONS

TATUM_ JT-C-6550-08 8W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	62.14	3000K	538lm			
8W	72.23	4000K	621lm	Ø50	15°, 30°, 45°	Ra90↑
	70.36	5000K	611lm			




	Lux in center	Beam width
2M	466 lux	2m
4M	116 lux	4m
6M	51 lux	6m
8M	29 lux	8m
10M	18 lux	10m

TATUM_ JT-C-8575-15 15W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	63.57	3000K	932lm			
15W	71.74	4000K	1070lm	Ø75	15°, 30°, 45°	Ra90↑
	71.09	5000K	1055lm			



	Lux in center	Beam width
2M	349 lux	1.39m
4M	87 lux	2.78m
6M	38 lux	4.18m
8M	21 lux	5.57m
10M	13 lux	6.96m



	Lux in center	Beam width
2M	339 lux	1.40m
4M	84 lux	2.81m
6M	37 lux	4.21m
8M	21 lux	5.62m
10M	13 lux	7.02m

BEAM ANGLE INFO



JORDAN

MJ-C-7060-10 / MJ-C-8575-15
DOWN LIGHT



Various moments on your lighting style.



JORDAN 조던 DOWN LIGHT

JORDAN · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Jordan 조던

DOWN LIGHT / 리플렉터 교체 가능

MJ-C-7060-10 / MJ-C-8575-15



MJ-C-7060-10



MJ-C-8575-15



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø70×H55
Power : 10W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H63
Power : 15W
Input Voltage : 220V




Jordan DOWN LIGHT

PRODUCT BASIC OPTIONS

JORDAN_ MJ-C-7060-10 10W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	62.14	3000K	536lm			
10W	74.44	4000K	628lm	Ø60	24°, 36°, 60°	Ra90↑
	75.36	5000K	623lm			




	Lux in center	Beam width
2M	466 lux	2m
4M	116 lux	4m
6M	51 lux	6m
8M	29 lux	8m
10M	18 lux	10m

JORDAN_ MJ-C-8575-15 15W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	64.57	3000K	963lm			
15W	73.74	4000K	1107lm	Ø75	24°, 36°, 60°	Ra90↑
	72.09	5000K	1083lm			



	Lux in center	Beam width
2M	349 lux	1.39m
4M	87 lux	2.78m
6M	38 lux	4.18m
8M	21 lux	5.57m
10M	13 lux	6.96m



	Lux in center	Beam width
2M	339 lux	1.40m
4M	84 lux	2.81m
6M	37 lux	4.21m
8M	21 lux	5.62m
10M	13 lux	7.02m

BEAM ANGLE INFO





JOKIC

NJ-C-6760-07 / NJ-C-8175-12 / NJ-C-9585-18
DOWN LIGHT

Various moments on your lighting style.



JOKIC 요키치 DOWN LIGHT



JOKIC · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.

Jokic 요키치

DOWN LIGHT

NJ-C-6760-07/NJ-C-8175-12/NJ-C-9585-18



NJ-C-6760-07

NJ-C-8175-12

NJ-C-9585-18






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø67×H53
Power : 7W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø81×H60
Power : 12W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø95×H70
Power : 18W
Input Voltage : 220V




Jokic DOWN LIGHT

PRODUCT BASIC OPTIONS

JOKIC_ NJ-C-6760-07 7W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	64.14	3000K	536lm			
7W	72.22	4000K	628lm	Ø60	15°, 24°, 36°	Ra90↑
	73.36	5000K	623lm			



Distance	Lux in center	Beam width
2M	211 lux	2m
4M	52 lux	4m
6M	23 lux	6m
8M	13 lux	8m
10M	8 lux	10m

JOKIC_ NJ-C-8175-12 12W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	63.57	3000K	764lm			
12W	72.74	4000K	875lm	Ø75	15°, 24°, 36°	Ra90↑
	71.09	5000K	854lm			



Distance	Lux in center	Beam width
2M	149 lux	1.83m
4M	37 lux	3.66m
6M	16 lux	5.49m
8M	9 lux	7.32m
10M	5 lux	9.15m

JOKIC_ NJ-C-9585-18 18W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	68.69	3000K	1240lm			
18W	78.94	4000K	1423lm	Ø85	15°, 24°, 36°	Ra90↑
	79.09	5000K	1427lm			



Distance	Lux in center	Beam width
2M	150 lux	1.82m
4M	37 lux	3.65m
6M	16 lux	5.48m
8M	9 lux	7.30m
10M	6 lux	9.13m

BEAM ANGLE INFO



EMBIID

JE-C-7060-06 / JE-C-8575-12 / JE-C-9585-18
DOWN LIGHT



EMBIID 엠비드
DOWN LIGHT



EMBIID · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Embiid **엠비드**

DOWN LIGHT

JE-C-7060-06/ JE-C-8575-12/ JE-C-9585-18



JE-C-7060-06

JE-C-8575-12

JE-C-9585-18






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø70×H38
Power : 6W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H40
Power : 12W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø95×H50
Power : 8W
Input Voltage : 220V




Embiid DOWN LIGHT

PRODUCT BASIC OPTIONS

EMBIID_ JE-C-7060-06 6W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	48.84	3000K	298lm			
6W	55.18	4000K	334lm	Ø60	24°, 36°	Ra90↑
	55.54	5000K	343lm			



Beam width	Lux in center
2m	736 lux
4m	184 lux
6m	81 lux
8m	46 lux
10m	29 lux

EMBIID_ JE-C-8575-12 12W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	51.43	3000K	620lm			
12W	60.84	4000K	732lm	Ø75	24°, 36°	Ra90↑
	59.83	5000K	722lm			



Beam width	Lux in center
2m	770 lux
4m	192 lux
6m	85 lux
8m	48 lux
10m	30 lux


EMBIID_ JE-C-9585-18 18W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	56.54	3000K	1068lm			
18W	64.07	4000K	1178lm	Ø85	24°, 36°	Ra90↑
	65.55	5000K	1200lm			



Beam width	Lux in center
2m	680 lux
4m	170 lux
6m	75 lux
8m	42 lux
10m	27 lux

BEAM ANGLE INFO





RODMAN

DR-C-8575-12-IP65
DOWN LIGHT

IP65



RODMAN 로드맨 DOWN LIGHT

RODMAN · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Rodman 로드맨

DOWN LIGHT / 리플렉터 교체 가능

DR-C-8575-12-IP65

IP65




DR-C-8575-12-IP65



PRODUCT BASIC OPTIONS

Housing : Aluminum
 Light Source : LED COB
 Size(mm) : Ø85×H65
 Power : 12W
 Input Voltage : 220V




Rodman DOWN LIGHT

PRODUCT BASIC OPTIONS


RODMAN_ DR-C-8575-12-IP 12W

Power	lm/W	CCT	Flux	Cut-out	IP	Beam	CRI
	74.22	3000K	925lm				
12W	80.94	4000K	976lm	Ø75	IP65	24°, 38°, 60°	Ra90↑
	81.30	5000K	977lm				


BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	364 lux	2m
4M	91 lux	4m
6M	40 lux	6m
8M	22 lux	8m
10M	14 lux	10m



Distance	Lux in center	Beam width
2M	254 lux	1.59m
4M	63 lux	3.19m
6M	28 lux	4.78m
8M	15 lux	6.38m
10M	19 lux	7.98m



Distance	Lux in center	Beam width
2M	254 lux	1.54m
4M	63 lux	3.09m
6M	28 lux	4.63m
8M	15 lux	6.18m
10M	10 lux	7.73m



HARDEN

JH-C-8275-10 / JH-C-10695-15 / JH-C-123110-20 / JH-C-155145-30
DOWN LIGHT



HARDEN 하든 DOWN LIGHT

HARDEN · DOWN LIGHT


Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Harden 하든

DOWN LIGHT

JH-C-8275-10/JH-C-10695-15/JH-C-123110-20/JH-C-155145-30

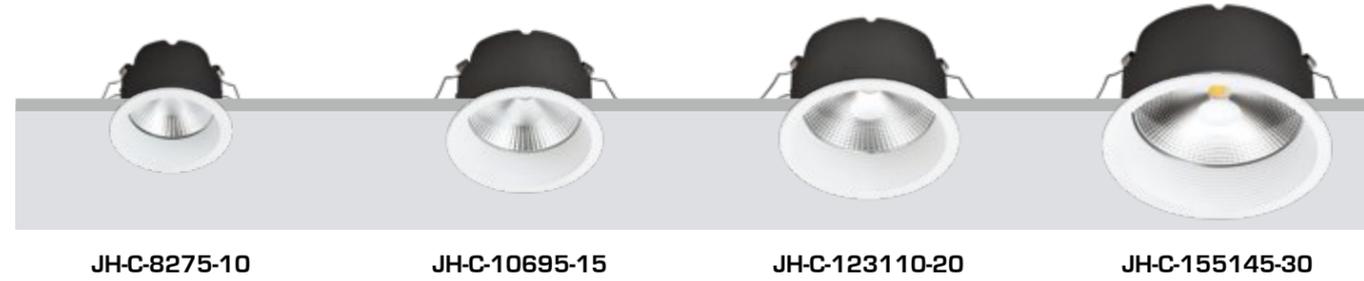

JH-C-8275-10

JH-C-10695-15

JH-C-123110-20

JH-C-155145-30







PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø82×H53
Power : 10W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø106×H63
Power : 15W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø123×H68
Power : 20W
Input Voltage(V) : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø155×H76
Power : 30W
Input Voltage : 220V



Harden DOWN LIGHT


BEAM ANGLE INFO



PRODUCT BASIC OPTIONS

HARDEN_ JH-C-8275-10 10W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	58.48	3000K	592lm			
10W	67.54	4000K	681lm	Ø75	45°	Ra90↑
	66.93	5000K	672lm			



Distance	Lux in center	Beam width
2M	466 lux	2m
4M	116 lux	4m
6M	51 lux	6m
8M	29 lux	8m
10M	18 lux	10m

HARDEN_ JH-C10695-15 15W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	67.48	3000K	1021lm			
15W	76.75	4000K	1165lm	Ø95	45°	Ra90↑
	75.29	5000K	1132lm			



Distance	Lux in center	Beam width
2M	349 lux	1.39m
4M	87 lux	2.78m
6M	38 lux	4.18m
8M	21 lux	5.57m
10M	13 lux	6.96m

HARDEN_ JH-C-123110-20 20W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	75.69	3000K	1533lm			
20W	83.94	4000K	1705lm	Ø110	45°	Ra90↑
	85.09	5000K	1768lm			



Distance	Lux in center	Beam width
2M	339 lux	1.40m
4M	84 lux	2.81m
6M	37 lux	4.21m
8M	21 lux	5.62m
10M	13 lux	7.02m

HARDEN_ JH-C-155145-30 30W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	81.56	3000K	2452lm			
30W	89.97	4000K	2712lm	Ø145	45°	Ra90↑
	91.12	5000K	2755lm			



LILLARD

DL-C-5845-05 / DL-C-8060-10 / DL-C-9880-15 / DL-C-122100-20
DOWN LIGHT



LILLARD 릴라드
DOWN LIGHT



LILLARD · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Lillard 릴라드

DOWN LIGHT

DL-C-5845-05/DL-C-8060-10/DL-C-9880-15/DL-C-122100-20



DL-C-5845-05

DL-C-8060-10

DL-C-9880-15

DL-C-122100-20







PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø58×H48
Power : 5W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø80×H66
Power : 10W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø98×H85
Power : 15W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø122×H92
Power : 20W
Input Voltage : 220V



Lillard DOWN LIGHT

PRODUCT BASIC OPTIONS

LILLARD_DL-C-5845-05 5W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	59.32	3000K	301lm			
5W	67.86	4000K	341lm	Ø45	36°, 48°, 60°	Ra90↑
	68.24	5000K	342lm			

LILLARD_DL-C-8060-10 10W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	60.67	3000K	613lm			
10W	69.65	4000K	697lm	Ø60	36°, 48°, 60°	Ra90↑
	68.93	5000K	691lm			



LILLARD_DL-C-9880-15 15W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	68.88	3000K	1034lm			
15W	78.45	4000K	1180lm	Ø80	36°, 48°, 60°	Ra90↑
	78.39	5000K	1177lm			


LILLARD_DL-C-122100-20 20W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	76.48	3000K	1531lm			
20W	86.53	4000K	1732lm	Ø100	36°, 48°, 60°	Ra90↑
	86.39	5000K	1730lm			


BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	498 lux	2m
4M	124 lux	4m
6M	55 lux	6m
8M	31 lux	8m
10M	19 lux	10m



Distance	Lux in center	Beam width
2M	344 lux	1.91m
4M	86 lux	3.83m
6M	38 lux	5.74m
8M	21 lux	7.66m
10M	13 lux	9.58m




Distance	Lux in center	Beam width
2M	342 lux	1.87m
4M	85 lux	3.75m
6M	38 lux	5.63m
8M	21 lux	7.51m
10M	13 lux	9.39m



MORANT

JM-S-6555-7*1 / JM-S-126115-7*2 / JM-S-187175-7*3 / JM-S-126115-7*4
DOWN LIGHT

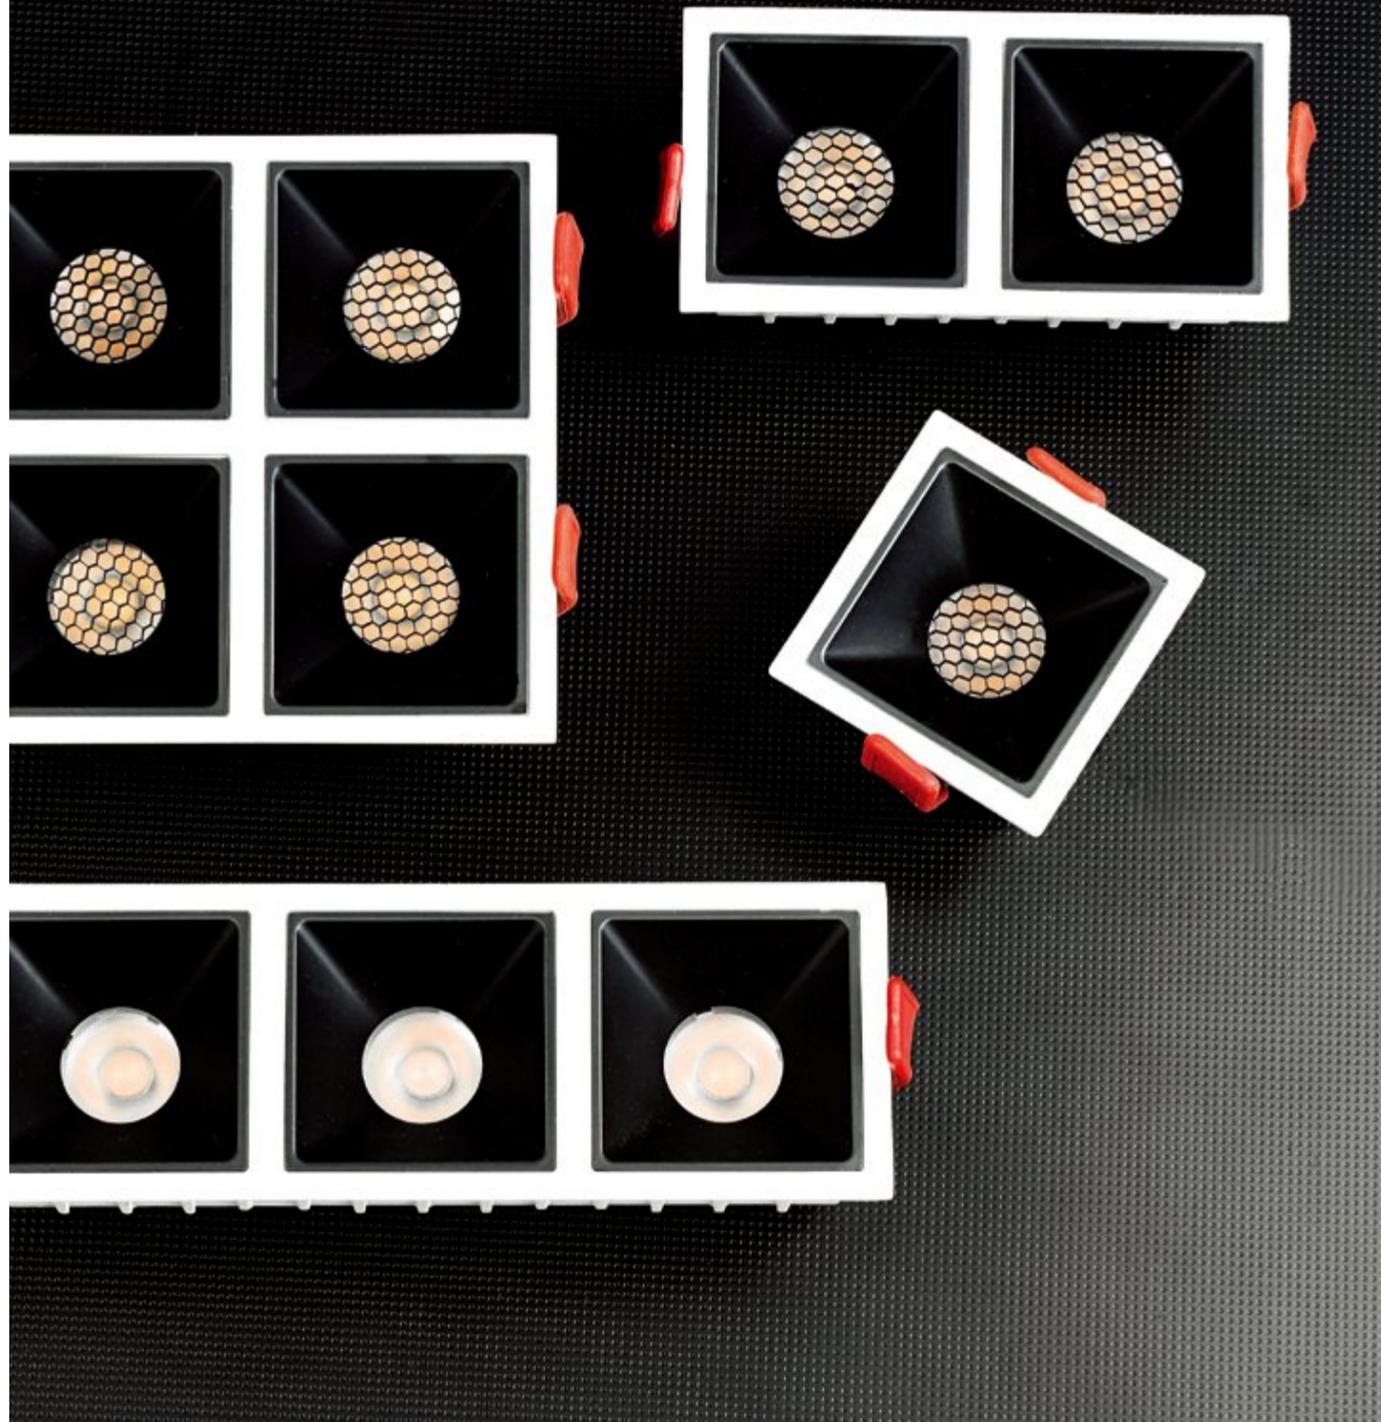

MORANT 모란트
DOWN LIGHT



MORANT · DOWN LIGHT


Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Morant 모란트

DOWN LIGHT

JM-S-6555-7*1/JM-S-126115-7*2/JM-S-187175-7*3/JM-S-126115-7*4

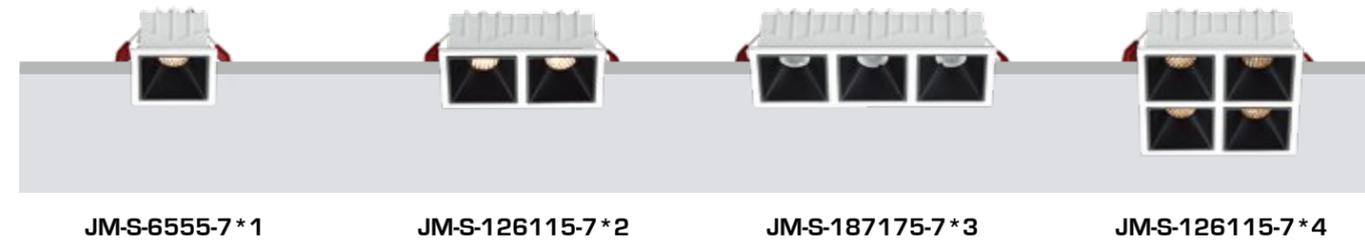

JM-S-6555-7*1

JM-S-126115-7*2

JM-S-187175-7*3

JM-S-126115-7*4







PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W65×D65×H52
Power : 7W×1
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W126×D65×H52
Power : 7W×2
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W187×D65×H52
Power : 7W×3
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W126×D126×H52
Power : 7W×4
Input Voltage : 220V




Morant DOWN LIGHT

PRODUCT BASIC OPTIONS

MORANT_ JM-S-6555-7*1 7W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	31.66	3000K	221lm			
7W×1	37.55	4000K	263lm	W55×D55	12°, 24°, 36°	Ra90↑
	36.82	5000K	259lm			



	Lux in center	Beam width
2M	330 lux	2m
4M	82 lux	4m
6M	36 lux	6m
8M	20 lux	8m
10M	13 lux	10m

MORANT_ JM-S-126115-7*2 14W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	33.93	3000K	476lm			
7W×2	39.85	4000K	558lm	W115×D65	12°, 24°, 36°	Ra90↑
	38.75	5000K	543lm			



	Lux in center	Beam width
2M	516 lux	0.86m
4M	129 lux	1.73m
6M	57 lux	2.60m
8M	32 lux	3.47m
10M	20 lux	4.34m

MORANT_ JM-S-187175-7*3 21W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	38.07	3000K	745lm			
7W×3	43.75	4000K	830lm	W175×D65	12°, 24°, 36°	Ra90↑
	42.82	5000K	862lm			



	Lux in center	Beam width
2M	516 lux	0.84m
4M	129 lux	1.69m
6M	57 lux	2.54m
8M	32 lux	3.39m
10M	20 lux	4.24m

MORANT_ JM-S-126115-7*4 28W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	42.11	3000K	1199lm			
7W×4	46.45	4000K	1310lm	W115×D115	12°, 24°, 36°	Ra90↑
	45.92	5000K	1298lm			

BEAM ANGLE INFO



DURANT


KD-S-8475-12*1 / KD-S-167155-12*2
DOWN LIGHT



DURANT 듀란트 DOWN LIGHT

DURANT · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.

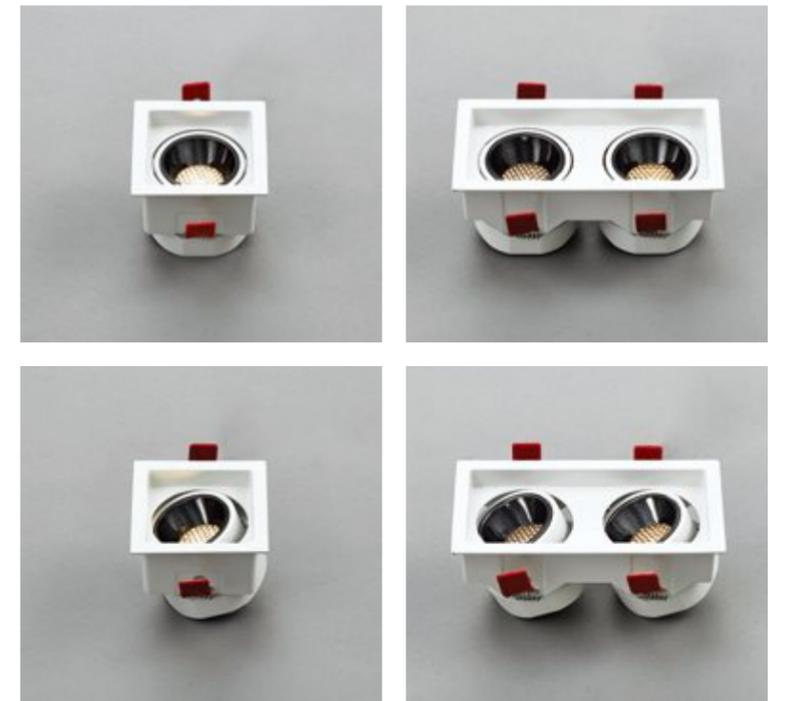

Durant 듀란트

DOWN LIGHT

KD-S-8475-12*1/KD-S-167155-12*2



KD-S-8475-12*1



KD-S-167155-12*2



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W84xD84xH67
Power : 12Wx1
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W167xD84xH67
Power : 12Wx2
Input Voltage : 220V




Durant DOWN LIGHT

PRODUCT BASIC OPTIONS

DURANT_ KD-S-8475-12*1 12W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	43.34	3000K	528lm			
12Wx1	48.54	4000K	593lm	W75xD75	15°, 24°, 36°	Ra90↑
	55.58	5000K	668lm			




Beam width	Lux in center
2m	932 lux
4m	233 lux
6m	103 lux
8m	58 lux
10m	37 lux

DURANT_ KD-S-167155-12*2 24W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	54.44	3000K	1343lm			
12Wx2	59.23	4000K	1432lm	W155xD75	15°, 24°, 36°	Ra90↑
	57.58	5000K	1382lm			



Beam width	Lux in center
2m	889 lux
4m	222 lux
6m	98 lux
8m	55 lux
10m	35 lux



Beam width	Lux in center
2m	854 lux
4m	213 lux
6m	94 lux
8m	53 lux
10m	34 lux

BEAM ANGLE INFO



JAMES

LJ-C-8575-10 / LJ-C-9885-15
DOWN LIGHT



JAMES 제임스 DOWN LIGHT

JAMES · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



James 제임스

DOWN LIGHT

LJ-C-8575-10/LJ-C-9885-15



LJ-C-8575-10



LJ-C-9885-15



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H80
Power : 10W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø98×H90
Power : 15W
Input Voltage : 220V



James DOWN LIGHT

PRODUCT BASIC OPTIONS



JAMES_ LJ-C-8575-10 10W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	59.28	3000K	594lm			
10W	67.45	4000K	676lm	Ø75	15°, 24°, 36°	Ra90↑
	66.93	5000K	669lm			


JAMES_ LJ-C-9885-15 15W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	66.98	3000K	1007lm			
15W	76.45	4000K	1165lm	Ø85	15°, 24°, 36°	Ra90↑
	76.39	5000K	1155lm			


BEAM ANGLE INFO



Height	Lux in center	Beam width
2M	466 lux	2m
4M	116 lux	4m
6M	51 lux	6m
8M	29 lux	8m
10M	18 lux	10m



Height	Lux in center	Beam width
2M	349 lux	1.39m
4M	87 lux	2.78m
6M	38 lux	4.18m
8M	21 lux	5.57m
10M	13 lux	6.96m



Height	Lux in center	Beam width
2M	339 lux	1.40m
4M	84 lux	2.81m
6M	37 lux	4.21m
8M	21 lux	5.62m
10M	13 lux	7.02m



PIPPEN

SP-C-5850-07 / SP-C-8575-12 / SP-C-10595-20
DOWN LIGHT



PIPPEN · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.

PIPPEN 피펜 DOWN LIGHT



Pippen 피펜

DOWN LIGHT / 리플렉터 교체 가능

SP-C-5850-07 / SP-C-8575-12 / SP-C-10595-20



SP-C-5850-07

SP-C-8575-12

SP-C-10595-20






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø58×H75
Power : 7W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H105
Power : 12W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø105×H120
Power : 20W
Input Voltage : 220V




Pippen DOWN LIGHT

PRODUCT BASIC OPTIONS

PIPPEN_ SP-C-5850-07 7W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	53.48	3000K	388lm			
7W	61.54	4000K	439lm	Ø50	15°, 24°, 36°	Ra90↑
	60.93	5000K	435lm			



Beam width	Lux in center
2m	211 lux
4m	52 lux
6m	23 lux
8m	13 lux
10m	8 lux

PIPPEN_ SP-C-8575-12 12W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	61.48	3000K	738lm			
12W	70.75	4000K	853lm	Ø75	15°, 24°, 36°	Ra90↑
	69.29	5000K	834lm			



Beam width	Lux in center
2m	149 lux
4m	37 lux
6m	16 lux
8m	9 lux
10m	5 lux

PIPPEN_ SP-C-10595-20 20W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	69.69	3000K	1397lm			
20W	75.94	4000K	1523lm	Ø95	15°, 24°, 36°	Ra90↑
	77.09	5000K	1556lm			



Beam width	Lux in center
1.82m	150 lux
3.65m	37 lux
5.48m	16 lux
7.30m	9 lux
9.13m	6 lux

BEAM ANGLE INFO



WADE

DW-C-3935-05 / DW-C-5950-10 / DW-C-7460-18
DOWN LIGHT



WADE 웨이드 DOWN LIGHT



WADE · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.



Wade 웨이드

DOWN LIGHT

DW-C-3935-05/DW-C-5950-10/DW-C-7460-18



DW-C-3935-05

DW-C-5950-10

DW-C-7460-18






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø39×H57
Power : 5W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø59×H82
Power : 10W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø74×H100
Power : 18W
Input Voltage : 220V





Wade DOWN LIGHT

PRODUCT BASIC OPTIONS

WADE_ DW-C-3935-05 5W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	38.32	3000K	198lm			
5W	47.86	4000K	240lm	Ø35	15°, 24°, 36°, 60°	Ra90↑
	48.51	5000K	243lm			



Beam width	Lux in center
2m	466 lux
4m	116 lux
6m	51 lux
8m	29 lux
10m	18 lux

WADE_ DW-C-5950-10 10W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	43.37	3000K	434lm			
10W	52.65	4000K	527lm	Ø50	15°, 24°, 36°, 60°	Ra90↑
	52.93	5000K	529lm			



Beam width	Lux in center
2m	349 lux
4m	87 lux
6m	38 lux
8m	21 lux
10m	13 lux

WADE_ DW-C-7460-18 18W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	52.88	3000K	951lm			
18W	57.45	4000K	1034lm	Ø60	15°, 24°, 36°, 60°	Ra90↑
	58.39	5000K	1051lm			



Beam width	Lux in center
2m	339 lux
4m	84 lux
6m	37 lux
8m	21 lux
10m	13 lux



THOMPSON

CT-C-3330-05 / CT-C-4340-08
DOWN LIGHT



THOMPSON 탐슨 DOWN LIGHT

THOMPSON · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.



Thompson 탐슨

DOWN LIGHT

CT-C-3330-05/CT-C-4340-08



CT-C-3330-05



CT-C-4340-08



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø33×H80
Power : 5W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø43×H90
Power : 8W
Input Voltage : 220V




Thompson DOWN LIGHT

PRODUCT BASIC OPTIONS

THOMPSON_ CT-C-3330-05 5W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	35.82	3000K	179lm			
5W	41.58	4000K	208lm	Ø30	38°	Ra90↑
	42.12	5000K	211lm			



Beam width	Lux in center
1m	1462 lux
2m	366 lux
3m	163 lux
4m	91 lux
5m	41 lux

THOMPSON_ CT-C-4340-08 8W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	40.26	3000K	324lm			
8W	49.12	4000K	394lm	Ø40	38°	Ra90↑
	50.04	5000K	400lm			



Beam width	Lux in center
1m	1117 lux
2m	279 lux
3m	124 lux
4m	70 lux
5m	30 lux

BEAM ANGLE INFO





DONCIC • CURRY

LD-C-140130-7*2 / LD-C-194184-12*2 / LD-C-238228-18*2
DOWN LIGHT

Various moments on your lighting style.

DONCIC 돈치치 DOWN LIGHT



DONCIC · CURRY DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.

CURRY 커리 DOWN LIGHT



Doncic 돈치치

DOWN LIGHT


LD-C-140130-7*2/LD-C-194184-12*2/LD-C-238228-18*2



LD-C-140130-7*2

LD-C-194184-12*2

LD-C-238228-18*2






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W140xD78xH91
Power : 7Wx2
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W194xD104xH116
Power : 12Wx2
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W238xD124xH140
Power : 18Wx2
Input Voltage : 220V




Doncic DOWN LIGHT

PRODUCT BASIC OPTIONS

DONCIC_ LD-C-140130-7*2 14W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	45.93	3000K	646lm			
7Wx2	51.85	4000K	726lm	W130xH70	15°, 24°, 38°	Ra90↑
	50.75	5000K	711lm			



Beam width	Lux in center
2m	932 lux
4m	233 lux
6m	103 lux
8m	58 lux
10m	37 lux

DONCIC_ LD-C-194184-12*2 24W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	56.44	3000K	1357lm			
12Wx2	64.23	4000K	1544lm	W184xH95	15°, 24°, 38°	Ra90↑
	65.58	5000K	1572lm			



Beam width	Lux in center
2m	889 lux
4m	222 lux
6m	98 lux
8m	55 lux
10m	35 lux

DONCIC_ LD-C-238228-18*2 36W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	62.44	3000K	2245lm			
18Wx2	64.23	4000K	2313lm	W228xH115	15°, 24°, 38°	Ra90↑
	64.58	5000K	2324lm			



Beam width	Lux in center
2m	854 lux
4m	213 lux
6m	94 lux
8m	53 lux
10m	34 lux


BEAM ANGLE INFO



Curry 커리

DOWN LIGHT


SC-C-5040-05/SC-C-7265-08/SC-C-8575-10/SC-C-10590-12

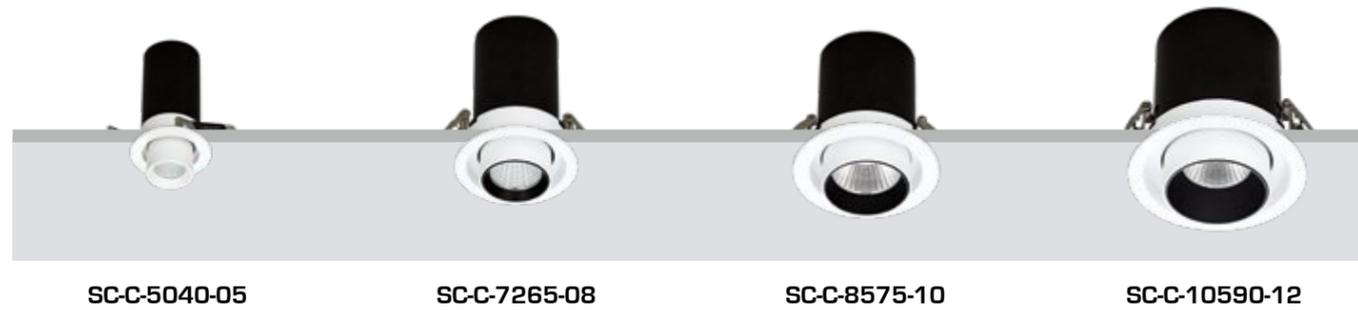

Curry DOWN LIGHT


PRODUCT BASIC OPTIONS

BEAM ANGLE INFO



CURRY_ SC-C-5040-05 5W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	33.48	3000K	168lm			
5W	35.44	4000K	177lm	Ø40	15°, 24°, 38°	Ra90↑
	35.73	5000K	179lm			



Distance	Lux in center	Beam width
2M	1462 lux	1m
4M	366 lux	2m
6M	163 lux	3m
8M	91 lux	4m
10M	41 lux	5m

CURRY_ SC-C-7265-08 8W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	37.48	3000K	275lm			
8W	39.54	4000K	304lm	Ø65	15°, 24°, 38°	Ra90↑
	39.93	5000K	305lm			



Distance	Lux in center	Beam width
2M	1117 lux	1m
4M	279 lux	2m
6M	124 lux	3m
8M	70 lux	4m
10M	30 lux	5m

CURRY_ SC-C-8575-10 10W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	39.51	3000K	395lm			
10W	42.13	4000K	422lm	Ø75	15°, 24°, 38°	Ra90↑
	41.92	5000K	420lm			

CURRY _ SC-C-10590-12 12W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	41.94	3000K	467lm			
12W	43.53	4000K	499lm	Ø90	15°, 24°, 38°	Ra90↑
	43.42	5000K	498lm			





PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø50×H90
Power : 5W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø72×H110
Power : 8W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H102
Power : 10W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø105×H110
Power : 12W
Input Voltage : 220V



LAVINE

JL-C-7565-08 / JL-C-9585-12

BUTLER

JM-C-9585-08

GIANNIS

GA-C-6050-05

MITCHELL


DM-C-4838-05



LAVINE 라빈
DOWN LIGHT



BUTLER 버틀러
DOWN LIGHT



DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



GIANNIS 야니스
DOWN LIGHT



MITCHELL 미첼
DOWN LIGHT

Lavine 라빈

DOWN LIGHT


JL-C-7565-08/JL-C-9585-12



JL-C-7565-08


JL-C-9585-12

JM-C-9585-08

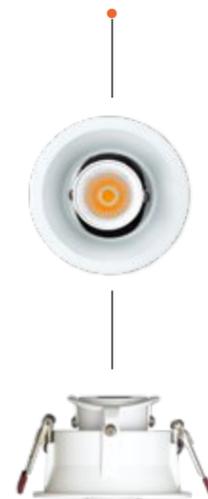


PRODUCT BASIC OPTIONS


Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø75×H100
Power : 8W
Input Voltage : 220V



Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø95×H85
Power : 12W
Input Voltage : 220V



Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø95×H60
Power : 8W
Input Voltage : 220V



Butler 버틀러

DOWN LIGHT

JM-C-9585-08

Lavine DOWN LIGHT

PRODUCT BASIC OPTIONS



LAVINE_ JL-C-9585-08 8W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	35.68	3000K	286lm			
8W	37.43	4000K	299lm	Ø65	15°, 24°, 36°	Ra90↑
	37.52	5000K	300lm			

LAVINE_ JL-C-9585-12 12W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	38.94	3000K	467lm			
12W	41.53	4000K	499lm	Ø85	15°, 24°, 36°	Ra90↑
	41.42	5000K	498lm			

BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	1117 lux	1m
4M	279 lux	2m
6M	124 lux	3m
8M	70 lux	4m
10M	30 lux	5m



Butler DOWN LIGHT

PRODUCT BASIC OPTIONS

BUTLER_ JM-C-9585-08 8W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	34.48	3000K	275lm			
8W	37.54	4000K	304lm	Ø85	15°, 24°, 36°	Ra90↑
	37.93	5000K	305lm			

BEAM ANGLE INFO




Distance	Lux in center	Beam width
2M	1117 lux	1m
4M	279 lux	2m
6M	124 lux	3m
8M	70 lux	4m
10M	30 lux	5m



Giannis 야니스
DOWN LIGHT
GA-C-6050-05

Mitchell 미첼
DOWN LIGHT
DM-C-4838-05

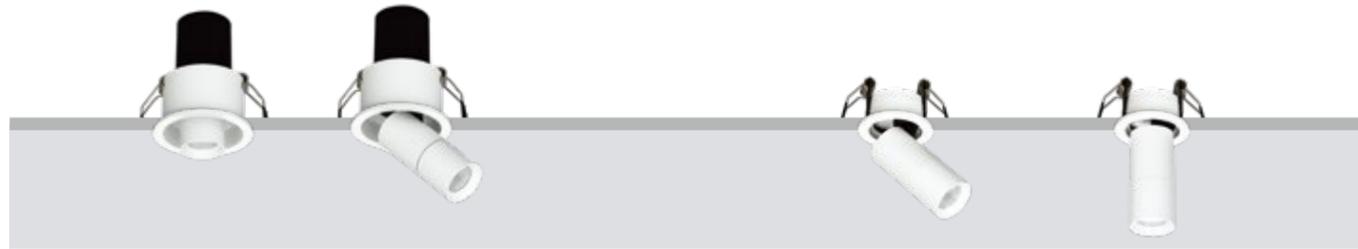

GA-C-6050-05



DM-C-4838-05



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø60×H90
Power : 5W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø48×H38
Power : 5W
Input Voltage : 220V




Giannis DOWN LIGHT

PRODUCT BASIC OPTIONS

GIANNIS_ GA-C-6050-05 5W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	31.38	3000K	157lm			
5W	33.53	4000K	168lm	Ø50	15°, 24°, 38°	Ra90↑
	33.42	5000K	167lm			



Beam width	Lux in center
1m	1462 lux
2m	366 lux
3m	163 lux
4m	91 lux
5m	41 lux

BEAM ANGLE INFO




Mitchell DOWN LIGHT

PRODUCT BASIC OPTIONS


MITCHELL_ DM-C-4838-05 5W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	30.18	3000K	151lm			
5W	32.13	4000K	161lm	Ø38	15°, 24°, 36°	Ra90↑
	32.32	5000K	162lm			




Beam width	Lux in center
1m	1462 lux
2m	366 lux
3m	163 lux
4m	91 lux
5m	41 lux

BEAM ANGLE INFO



IRVING

KI-S-5040-5*1 / KI-S-10090-5*2 / KI-S-140130-5*3
KI-S-175165-5*4 / KI-S-220210-5*5
DOWN LIGHT

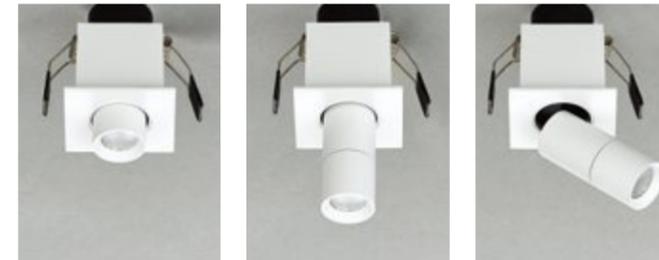


IRVING 어빙
DOWN LIGHT



IRVING · DOWN LIGHT


Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.

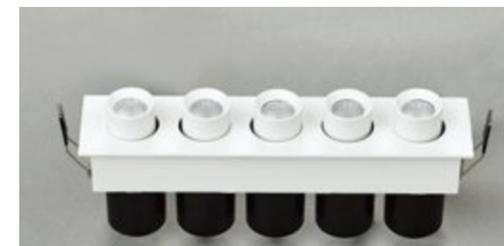

Irving 어빙

DOWN LIGHT

KI-S-5040-5*1/KI-S-10090-5*2/KI-S-140130-5*3

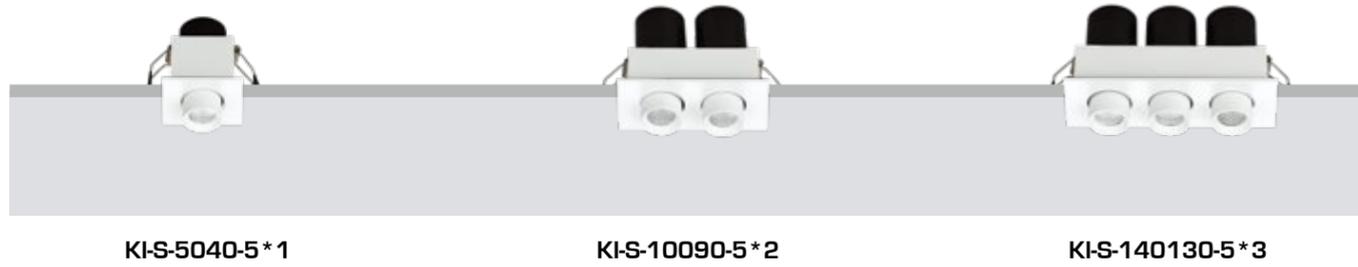

KI-S-5040-5*1

KI-S-10090-5*2

KI-S-140130-5*3






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W50×D50
Power : 5W×1
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W100×D50
Power : 5W×2
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W140×D50
Power : 5W×3
Input Voltage : 220V




Irving DOWN LIGHT

PRODUCT BASIC OPTIONS

IRVING_ KI-S-5040-5*1 5W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	49.18	3000K	246lm			
5W×1	68.13	4000K	348lm	W40×D40	8°, 15°, 24°, 36°	Ra90↑
	67.32	5000K	341lm			



	Lux in center	Beam width
2M	654 lux	2m
4M	163 lux	4m
6M	72 lux	6m
8M	40 lux	8m
10M	26 lux	10m

IRVING_ KI-S-10090-5*2 10W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	56.23	3000K	568lm			
5W×2	75.14	4000K	755lm	W90×D40	8°, 15°, 24°, 36°	Ra90↑
	73.65	5000K	737lm			



	Lux in center	Beam width
2M	439 lux	1.72m
4M	109 lux	3.44m
6M	48 lux	5.16m
8M	27 lux	6.88m
10M	17 lux	8.60m

IRVING_ KI-S-140130-5*3 15W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	62.23	3000K	942lm			
5W×3	83.77	4000K	1258lm	W130×D40	8°, 15°, 24°, 36°	Ra90↑
	81.93	5000K	1230lm			



	Lux in center	Beam width
2M	439 lux	1.72m
4M	109 lux	3.44m
6M	48 lux	5.16m
8M	27 lux	6.88m
10M	17 lux	8.60m


BEAM ANGLE INFO



Irving 어빙

DOWN LIGHT

KI-S-175165-5*4/KI-S-220210-5*5

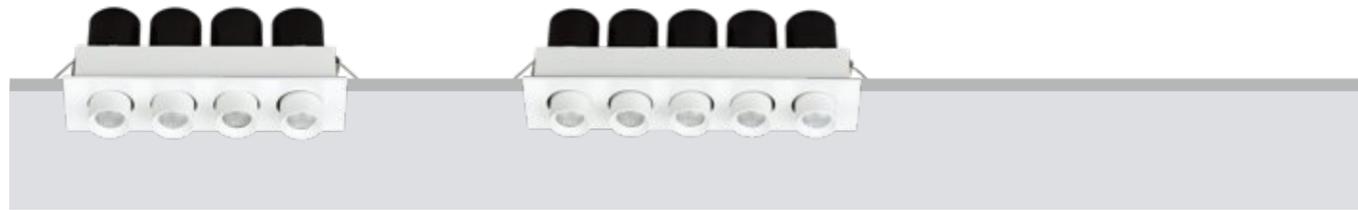

KI-S-175165-5*4



KI-S-220210-5*5



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W175xD50
Power : 5Wx4
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W220xD50
Power : 5Wx5
Input Voltage : 220V

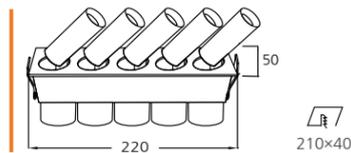


Irving DOWN LIGHT

PRODUCT BASIC OPTIONS

IRVING_ KI-S-175165-5*4 20W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	86.16	3000K	1687lm			
5Wx4	93.89	4000K	1804lm	W165xD40	8°, 15°, 24°, 36°	Ra90↑
	92.86	5000K	1792lm			




Beam width	Lux in center
2m	654 lux
4m	163 lux
6m	72 lux
8m	40 lux
10m	26 lux

IRVING_ KI-S-220210-5*5 25W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	74.87	3000K	1872lm			
5Wx5	102.41	4000K	2567lm	W210xD40	8°, 15°, 24°, 36°	Ra90↑
	101.76	5000K	2549lm			



Beam width	Lux in center
2m	439 lux
4m	109 lux
6m	48 lux
8m	27 lux
10m	17 lux




Beam width	Lux in center
2m	439 lux
4m	109 lux
6m	48 lux
8m	27 lux
10m	17 lux

BEAM ANGLE INFO



BOOKER

DB-S-175165-5*4 / DB-S-220210-5*5
DOWN LIGHT

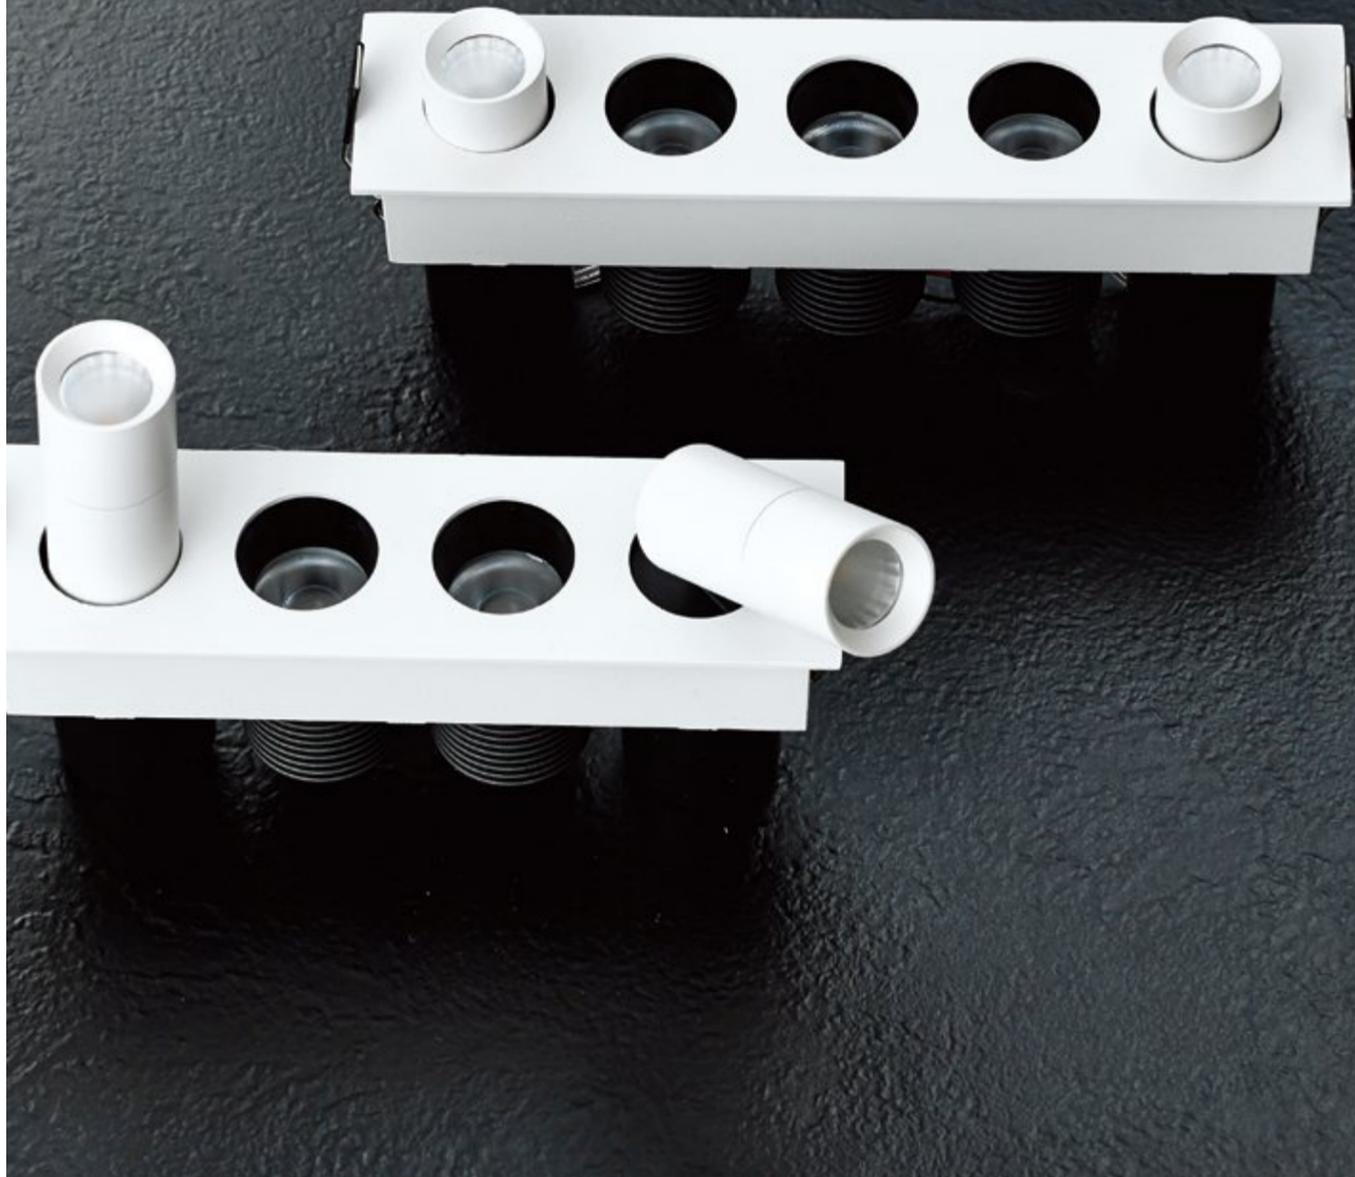

BOOKER 부커 DOWN LIGHT



BOOKER · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Booker 부커


DOWN LIGHT

DB-S-175165-5*4/DB-S-220210-5*5



DB-S-175165-5*4



DB-S-220210-5*5

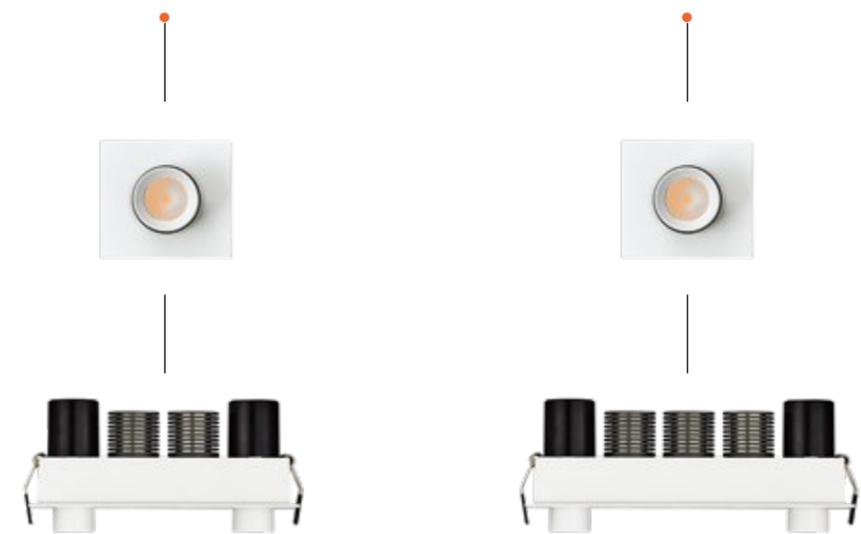

PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W175xD50
Power : 5W×4
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W220xD50
Power : 5W×5
Input Voltage : 220V

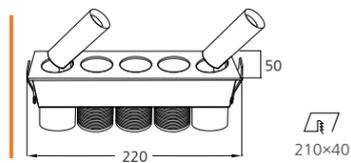


Booker DOWN LIGHT

PRODUCT BASIC OPTIONS

BOOKER_ DB-S-175165-5*4 20W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	80.45	3000K	1611lm			
5W×4	86.78	4000K	1739lm	W165×D40	8°, 15°, 24°, 36°	Ra90↑
	87.12	5000K	1748lm			




Beam width	Lux in center
2m	1120 lux
4m	280 lux
6m	124 lux
8m	70 lux
10m	44 lux

BOOKER_ DB-S-220210-5*5 25W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	87.23	3000K	2013lm			
5W×5	93.88	4000K	2099lm	W210×D40	8°, 15°, 24°, 36°	Ra90↑
	93.48	5000K	2107lm			



Beam width	Lux in center
2m	765 lux
4m	191 lux
6m	85 lux
8m	47 lux
10m	30 lux




Beam width	Lux in center
2m	856 lux
4m	214 lux
6m	95 lux
8m	53 lux
10m	34 lux

BEAM ANGLE INFO



IVERSON

AI-S-10090-5*1 / AI-S-10090-5*2 / AI-S-140130-5*3 /
AI-S-175165-5*4 / AI-S-220210-5*5
DOWN LIGHT

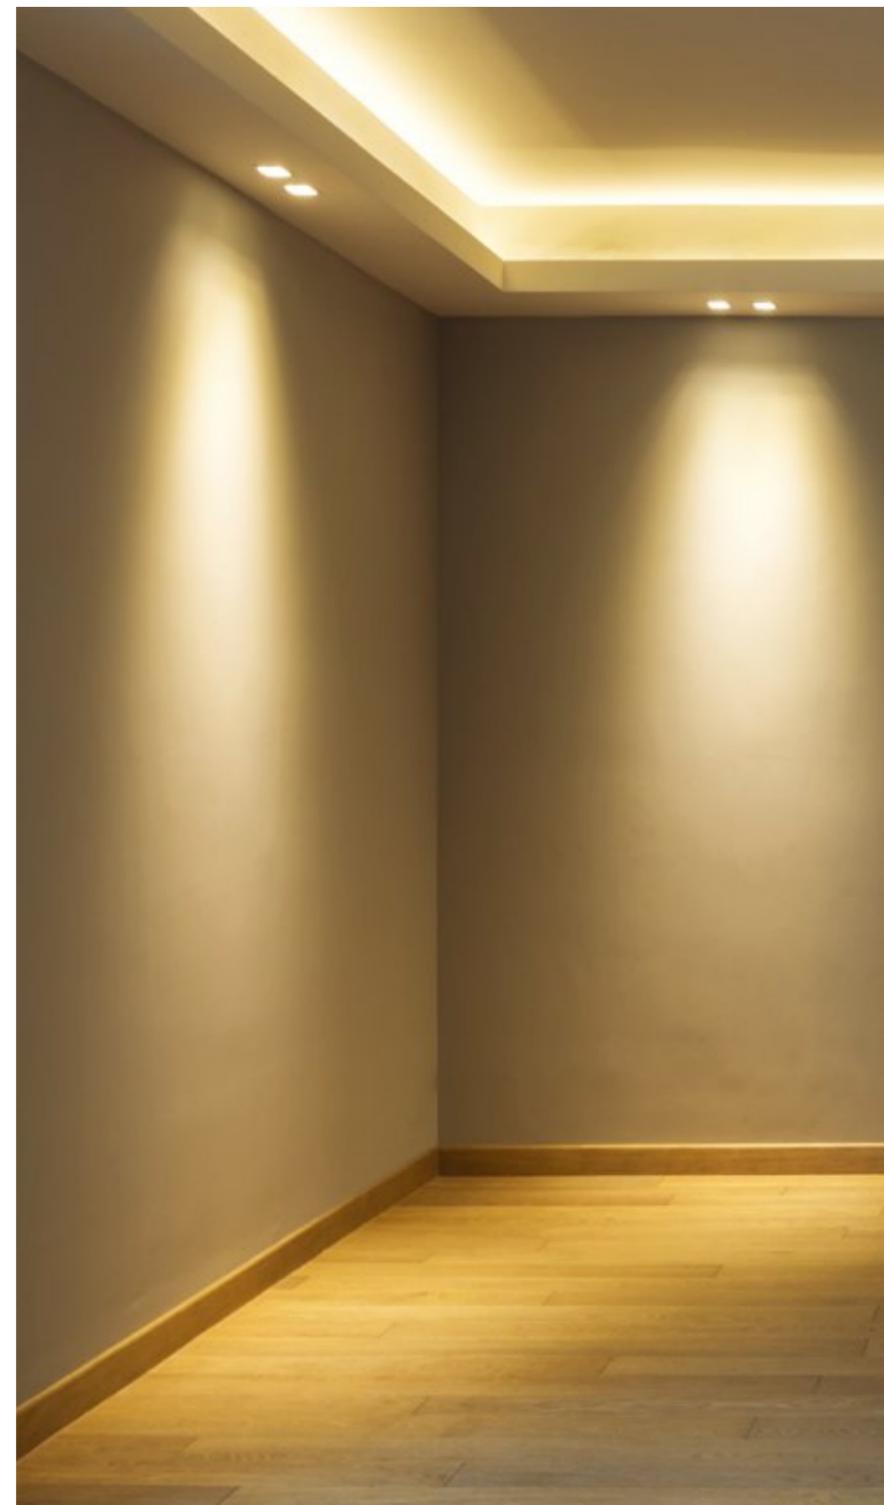

IVERSON 아이버슨 DOWN LIGHT

IVERSON · DOWN LIGHT


Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Iverson 아이버슨

DOWN LIGHT




AI-S-10090-5*1/AI-S-10090-5*2/AI-S-140130-5*3

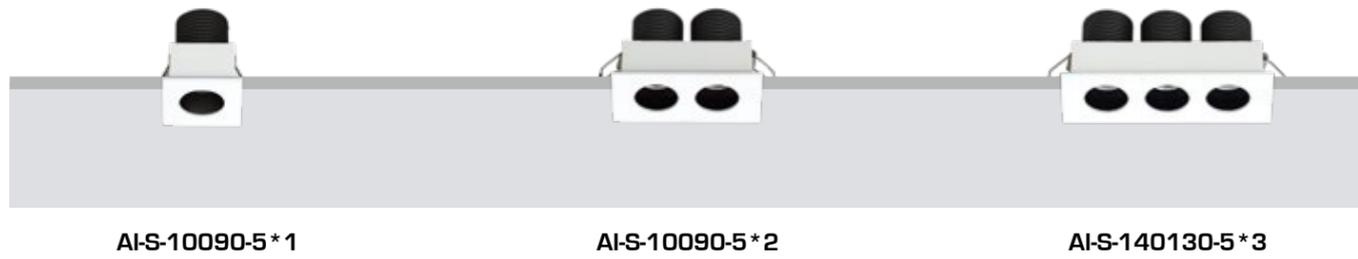

AI-S-10090-5*1

AI-S-10090-5*2

AI-S-140130-5*3






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W50×D50
Power : 5W×1
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W100×D50
Power : 5W×2
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W140×D50
Power : 5W×3
Input Voltage : 220V




Iverson DOWN LIGHT

PRODUCT BASIC OPTIONS

IVERSON_ AI-S-10090-5*1 5W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	61.08	3000K	308lm			
5W×1	69.01	4000K	348lm	W40×D40	8°, 15°, 24°, 36°	Ra90↑
	68.98	5000K	347lm			



Beam angle	Lux in center	Beam width
2M	1120 lux	2m
4M	280 lux	4m
6M	124 lux	6m
8M	70 lux	8m
10M	44 lux	10m

IVERSON_ AI-S-10090-5*2 10W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	68.43	3000K	688lm			
5W×2	76.57	4000K	770lm	W90×D40	8°, 15°, 24°, 36°	Ra90↑
	75.94	5000K	762lm			



Beam angle	Lux in center	Beam width
2M	765 lux	1.33m
4M	191 lux	2.67m
6M	85 lux	4.01m
8M	47 lux	5.34m
10M	30 lux	6.68m

IVERSON_ AI-S-140130-5*3 15W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	74.13	3000K	1109lm			
5W×3	81.77	4000K	1228lm	W130×D40	8°, 15°, 24°, 36°	Ra90↑
	81.44	5000K	1223lm			



Beam angle	Lux in center	Beam width
2M	856 lux	1.29m
4M	214 lux	2.58m
6M	95 lux	3.88m
8M	53 lux	5.17m
10M	34 lux	6.47m

BEAM ANGLE INFO



Iverson 아이버슨

DOWN LIGHT

KI-S-175165-5*4/KI-S-220210-5*5



AI-S-175165-5*4



AI-S-220210-5*5



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W175xD50
Power : 5W×4
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W220xD50
Power : 5W×5
Input Voltage : 220V

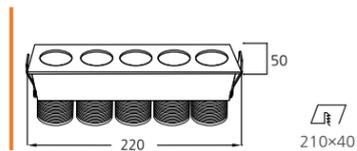

Iverson DOWN LIGHT

PRODUCT BASIC OPTIONS



IVERSON_ AI-S-175165-5*4 20W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	81.33	3000K	1629lm			
5W×4	88.58	4000K	1775lm	W165×D40	8°, 15°, 24°, 36°	Ra90↑
	98.33	5000K	1970lm			


IVERSON_ AI-S-220210-5*5 25W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	89.23	3000K	2228lm			
5W×5	95.68	4000K	2390lm	W210×D40	8°, 15°, 24°, 36°	Ra90↑
	95.57	5000K	2378lm			


BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	1120 lux	2m
4M	280 lux	4m
6M	124 lux	6m
8M	70 lux	8m
10M	44 lux	10m



Distance	Lux in center	Beam width
2M	765 lux	1.33m
4M	191 lux	2.67m
6M	85 lux	4.01m
8M	47 lux	5.34m
10M	30 lux	6.68m



Distance	Lux in center	Beam width
2M	856 lux	1.29m
4M	214 lux	2.58m
6M	95 lux	3.88m
8M	53 lux	5.17m
10M	34 lux	6.47m





BARKLEY

CB-S-130115-30*1 / CB-S-245225-30*2 / CB-S-360335-30*3
DOWN LIGHT

CB-S-10085-15*1 / CB-S-188165-15*2 / CB-S-276250-15*3
DOWN LIGHT



BARKLEY 바클리 DOWN LIGHT

BARKLEY · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



Barkley 바클리

DOWN LIGHT


CB-S-130115-30*1/CB-S-245225-30*2/CB-S-360335-30*3



CB-S-130115-30*1

CB-S-245225-30*2

CB-S-360335-30*3



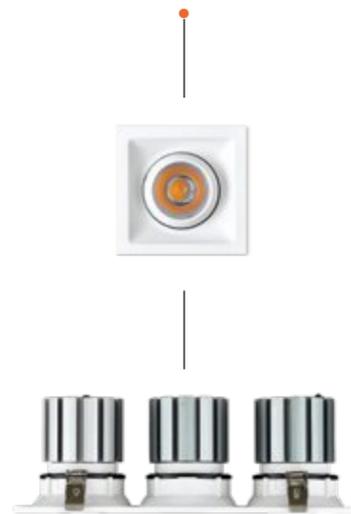


PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W130xD130xH120
Power : 30Wx1
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W245xD130xH120
Power : 30Wx2
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W360xD130xH120
Power : 30Wx3
Input Voltage : 220V




Barkley DOWN LIGHT

PRODUCT BASIC OPTIONS

BARKLEY_CB-S-130115-30 30W*1


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	82.47	3000K	2475lm			
30Wx1	83.77	4000K	2515lm	W115xD115	15°, 24°, 36°	Ra90↑
	83.06	5000K	2493lm			



Beam width	Lux in center
2m	3304 lux
4m	826 lux
6m	367 lux
8m	206 lux
10m	132 lux

BARKLEY_CB-S-245225-30 30W*2


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	92.33	3000K	5540lm			
30Wx2	92.85	4000K	5571lm	W225xD115	15°, 24°, 36°	Ra90↑
	93.45	5000K	5608lm			



Beam width	Lux in center
2m	2040 lux
4m	509 lux
6m	226 lux
8m	127 lux
10m	81 lux

BARKLEY_CB-S-360335-30 30W*3

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	95.33	3000K	8579lm			
30Wx3	96.85	4000K	8716lm	W335xD115	15°, 24°, 36°	Ra90↑
	95.45	5000K	8590lm			



Beam width	Lux in center
2m	2151 lux
4m	537 lux
6m	239 lux
8m	134 lux
10m	86 lux

BEAM ANGLE INFO



Barkley 바클리

DOWN LIGHT

CB-S-10085-15*1/CB-S-188165-15*2/CB-S-276250-15*3



CB-S-10085-15*1

CB-S-188165-15*2

CB-S-276250-15*3






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : W100xD100xH108
Power : 15Wx1
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W188xD100xH108
Power : 15Wx2
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : W276xD100xH108
Power : 15Wx3
Input Voltage : 220V




Barkley DOWN LIGHT

PRODUCT BASIC OPTIONS

BARKLEY_CB-S-10085-15*1 15W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	75.02	3000K	1126lm			
15Wx1	76.08	4000K	1143lm	W85xD85	15°, 24°, 36°, 60°	Ra90↑
	86.18	5000K	1293lm			



Beam width	Lux in center
1m	7939 lux
2m	1985 lux
3m	882 lux
4m	496 lux
5m	210 lux

BARKLEY_CB-S-188165-15*2 30W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	85.47	3000K	2567lm			
15Wx2	86.77	4000K	2605lm	W165xD85	15°, 24°, 36°, 60°	Ra90↑
	87.06	5000K	2612lm			



Beam width	Lux in center
1m	11354 lux
2m	2838 lux
3m	1262 lux
4m	710 lux
5m	410 lux

BARKLEY_CB-S-276250-15*3 45W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	88.66	3000K	3989lm			
15Wx3	93.36	4000K	3272lm	W250xD85	15°, 24°, 36°, 60°	Ra90↑
	94.46	5000K	4250lm			



Beam width	Lux in center
1m	14760 lux
2m	3689 lux
3m	1640 lux
4m	922 lux
5m	520 lux

BEAM ANGLE INFO



LEONARD

KL-C-4335-09 / KL-C-5245-12
DOWN LIGHT



Various moments on your lighting style.



LEONARD · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



LEONARD 레너드 DOWN LIGHT



Leonard 레너드

DOWN LIGHT

KL-C-4335-09/KL-C-5245-12



KL-C-4335-09


KL-C-5245-12



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø43×H67
Power : 9W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø52×H77
Power : 12W
Input Voltage : 220V




Leonard DOWN LIGHT

PRODUCT BASIC OPTIONS

LEONARD_ KL-C-4335-09 9W


Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	60.18	3000K	545lm			
9W	71.35	4000K	644lm	Ø35	15°, 24°, 36°	Ra90↑
	70.88	5000K	640lm			




	Lux in center	Beam width
2M	211 lux	2m
4M	52 lux	4m
6M	23 lux	6m
8M	13 lux	8m
10M	8 lux	10m

LEONARD_ KL-C-5245-12 12W

Power	lm/W	CCT	Flux	Cut-out	Beam	CRI
	65.68	3000K	789lm			
12W	76.55	4000K	919lm	Ø45	15°, 24°, 36°	Ra90↑
	75.88	5000K	912lm			




	Lux in center	Beam width
2M	149 lux	1.83m
4M	37 lux	3.66m
6M	16 lux	5.49m
8M	9 lux	7.32m
10M	5 lux	9.15m



	Lux in center	Beam width
2M	150 lux	1.82m
4M	37 lux	3.65m
6M	16 lux	5.48m
8M	9 lux	7.30m
10M	6 lux	9.13m

BEAM ANGLE INFO




TRIMLESS



MULTI · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.

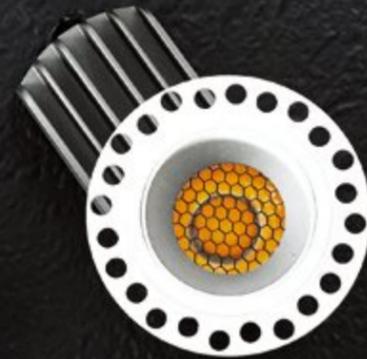

MULTI · DOWN LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



MR16 Accessories 엔진 반사판
15° 24° 38° 45° 60°



Reflector ACCESSORIES



Various moments on your lighting style.

PRODUCT BASIC OPTIONS




Reflector ACCESSORIES


UGR <19




REFLECTOR 15°

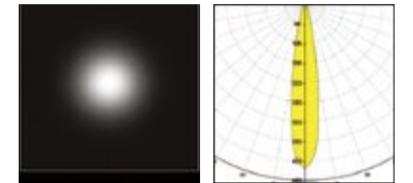


REFLECTOR 24°

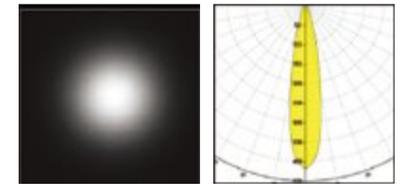


REFLECTOR 38°

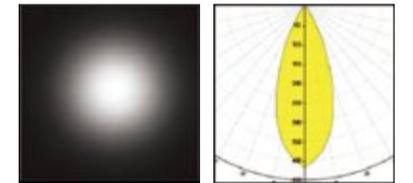

REFLECTOR 45°

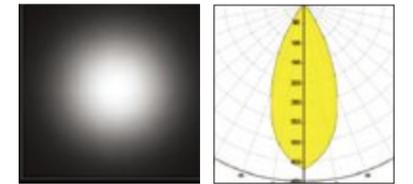

REFLECTOR 60°

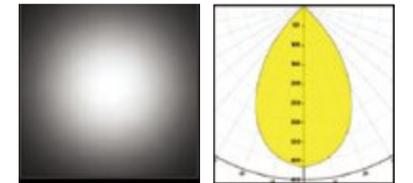



SMOLTZ

JS-CL-55130-12 / JS-CL-55270-12
CEILING LIGHT

Various moments on your lighting style.



SMOLTZ 스포츠 CEILING LIGHT

SMOLTZ · CEILING LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.





JS-CL-55130-12



JS-CL-55270-12



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø55×H130
Power : 12W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø55×H270
Power : 12W
Input Voltage : 220V



PRODUCT BASIC OPTIONS



SMOLTZ_ JS-CL-55130-12 12W

Power	lm/W	CCT	Flux	Beam	CRI
	58.68	3000K	708lm		
12W	66.55	4000K	799lm	15°, 24°, 36°	Ra90↑
	65.88	5000K	792lm		


SMOLTZ_ JS-CL-55270-12 12W

Power	lm/W	CCT	Flux	Beam	CRI
	60.45	3000K	728lm		
12W	68.32	4000K	821lm	5°, 24°, 36°	Ra90↑
	67.68	5000K	816lm		


BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	364 lux	2m
4M	91 lux	4m
6M	40 lux	6m
8M	22 lux	8m
10M	14 lux	10m



Distance	Lux in center	Beam width
2M	254 lux	1.59m
4M	63 lux	3.19m
6M	28 lux	4.78m
8M	15 lux	6.38m
10M	10 lux	7.98m



Distance	Lux in center	Beam width
2M	254 lux	1.54m
4M	63 lux	3.09m
6M	28 lux	4.63m
8M	15 lux	6.18m
10M	10 lux	7.73m



Berra 베라
 CEILING LIGHT
 YB-CL-35120-05




YB-CL-35120-05



PRODUCT BASIC OPTIONS

Housing : Aluminum
 Light Source : LED COB
 Size(mm) : Ø35×H120
 Power : 5W
 Input Voltage : 220V




Berra CEILING LIGHT

PRODUCT BASIC OPTIONS

BERRA_ YB-CL-35120-05 5W

Power	lm/W	CCT	Flux	Beam	CRI
	45.18	3000K	228lm		
5W	52.13	4000K	263lm	15°, 24°, 36°	Ra90↑
	51.32	5000K	258lm		

BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	1462 lux	1m
4M	366 lux	2m
6M	163 lux	3m
8M	91 lux	4m
10M	41 lux	5m



Maddux 매덕스

CEILING LIGHT

GM-CL-45160-08/GM-CL-60175-12



GM-CL-45160-08



GM-CL-60175-12



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø45×H160
Power : 8W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø60×H175
Power : 12W
Input Voltage : 220V



Maddux CEILING LIGHT

PRODUCT BASIC OPTIONS


MADDUX_ GM-CL-45160-08 8W

Power	lm/W	CCT	Flux	Beam	CRI
	59.88	3000K	482lm		
8W	70.25	4000K	564lm	15°, 24°, 38°, 60°	Ra90↑
	69.98	5000K	561lm		


MADDUX_ GM-CL-60175-12 12W

Power	lm/W	CCT	Flux	Beam	CRI
	68.68	3000K	826lm		
12W	79.55	4000K	957lm	15°, 24°, 38°, 60°	Ra90↑
	78.88	5000K	947lm		


BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	211 lux	2m
4M	52 lux	4m
6M	23 lux	6m
8M	13 lux	8m
10M	8 lux	10m



Distance	Lux in center	Beam width
2M	149 lux	1.83m
4M	37 lux	3.66m
6M	16 lux	5.49m
8M	9 lux	7.32m
10M	5 lux	9.15m



Distance	Lux in center	Beam width
2M	150 lux	1.82m
4M	37 lux	3.65m
6M	16 lux	5.48m
8M	9 lux	7.30m
10M	6 lux	9.13m



Rivera 리베라
 CEILING LIGHT
 MR-CL-50165-10




MR-CL-50165-10



PRODUCT BASIC OPTIONS

Housing : Aluminum
 Light Source : LED COB
 Size(mm) : Ø50×H165
 Power : 10W
 Input Voltage : 220V




Rivera CEILING LIGHT

PRODUCT BASIC OPTIONS


RIVERA_ MR-CL-50165-10 10W

Power	lm/W	CCT	Flux	Beam	CRI
	62.38	3000K	628lm		
10W	73.55	4000K	737lm	15°, 24°, 38°, 60°	Ra90 ¹
	72.78	5000K	730lm		


BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	211 lux	2m
4M	52 lux	4m
6M	23 lux	6m
8M	13 lux	8m
10M	8 lux	10m



Distance	Lux in center	Beam width
2M	149 lux	1.83m
4M	37 lux	3.66m
6M	16 lux	5.49m
8M	9 lux	7.32m
10M	5 lux	9.15m



Distance	Lux in center	Beam width
2M	150 lux	1.82m
4M	37 lux	3.65m
6M	16 lux	5.48m
8M	9 lux	7.30m
10M	6 lux	9.13m





JETER

DJ -CL-78110-12
CEILING LIGHT

Various moments on your lighting style.



JETER · CEILING LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



JETER 지터
CEILING LIGHT



Jeter 지터

CEILING LIGHT

DJ-CL-78110-12/DJ-CL-78110-12



DJ-CL-78110-12




DJ-CL-78110-12



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø78×H110
Power : 12W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø78×H110
Power : 12W
Input Voltage : 220V




Jeter CEILING LIGHT

PRODUCT BASIC OPTIONS


JETER_ DJ-CL-78110-12 12W

Power	lm/W	CCT	Flux	Beam	CRI
	68.48	3000K	825lm		
12W	75.75	4000K	911lm	24°, 36°	Ra90↑
	74.29	5000K	892lm		


BEAM ANGLE INFO



Distance	Lux in center	Beam width
2M	364 lux	2m
4M	91 lux	4m
6M	40 lux	6m
8M	22 lux	8m
10M	14 lux	10m



Distance	Lux in center	Beam width
2M	254 lux	1.59m
4M	63 lux	3.19m
6M	28 lux	4.78m
8M	15 lux	6.38m
10M	10 lux	7.98m



Distance	Lux in center	Beam width
2M	254 lux	1.54m
4M	63 lux	3.09m
6M	28 lux	4.63m
8M	15 lux	6.18m
10M	10 lux	7.73m



ROBINSON

JR-CL-75152-20-IP / JR-CL-115152-30-IP / JR-CL-140162-40-IP
JR-CL-170182-50-IP / JR-CL-205212-60-IP
CEILING LIGHT

IP65



ROBINSON 로빈슨 CEILING LIGHT



ROBINSON · CEILING LIGHT

Ceiling light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.



Robinson 로빈슨

CEILING LIGHT

JR-CL-75152-20-IP/JR-CL-115152-30-IP/JR-CL-140162-40-IP/JR-CL-170182-50-IP

IP65



JR-CL-75152-20-IP



JR-CL-115152-30-IP



JR-CL-140162-40-IP



JR-CL-170182-50-IP







PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø75×H152
Power : 20W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø115×H152
Power : 30W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø140×H162
Power : 40W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø170×H182
Power : 50W
Input Voltage : 220V



Robinson CEILING LIGHT

PRODUCT BASIC OPTIONS

ROBINSON_ JR-CL-75152-20-IP 20W

Power	lm/W	CCT	Flux	IP	Beam	CRI
	76.02	3000K	1520lm			
20W	77.08	4000K	1541lm	IP65	20°, 40°	Ra90↑
	81.18	5000K	1623lm			

ROBINSON_ JR-CL-115152-30-IP 30W

Power	lm/W	CCT	Flux	IP	Beam	CRI
	80.47	3000K	2383lm			
30W	79.77	4000K	2333lm	IP65	20°, 40°	Ra90↑
	85.06	5000K	2467lm			


ROBINSON_ JR-CL-140162-40-IP 40W

Power	lm/W	CCT	Flux	IP	Beam	CRI
	79.46	3000K	3178lm			
40W	84.46	4000K	3272lm	IP65	20°, 40°	Ra90↑
	85.94	5000K	3303lm			


ROBINSON_ JR-CL-170182-50-IP 50W

Power	lm/W	CCT	Flux	IP	Beam	CRI
	82.02	3000K	4098lm			
50W	89.15	4000K	4458lm	IP65	20°, 40°	Ra90↑
	86.82	5000K	4342lm			


BEAM ANGLE INFO




Distance (M)	Lux in center	Beam width
2M	2040 lux	0.72m
4M	509 lux	1.44m
6M	226 lux	2.17m
8M	127 lux	2.89m
10M	81 lux	3.62m



Distance (M)	Lux in center	Beam width
2M	2151 lux	0.72m
4M	537 lux	1.44m
6M	239 lux	2.16m
8M	134 lux	2.88m
10M	86 lux	3.60m



Distance (M)	Lux in center	Beam width
2M	1204 lux	1.28m
4M	301 lux	2.56m
6M	133 lux	3.84m
8M	75 lux	5.12m
10M	48 lux	6.40m



Distance (M)	Lux in center	Beam width
2M	1195 lux	1.23m
4M	298 lux	2.46m
6M	132 lux	3.69m
8M	74 lux	4.92m
10M	47 lux	6.16m



SCHILLING 실링

CS-SP-55155-15 / CS-SP-75155-30
CS-SP-85165-35
SPOT LIGHT



SCHILLING AC SPOT



SCHILLING · SPOT LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.

Schilling 실링

SPOT LIGHT

CS-SP-55155-15/CS-SP-75155-30/CS-SP-85165-35



CS-SP-55155-15



CS-SP-75155-30



CS-SP-85165-35






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø55×H115
Power : 15W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø75×H155
Power : 30W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H165
Power : 35W
Input Voltage : 220V




Schilling SPOT LIGHT

PRODUCT BASIC OPTIONS

SCHILLING_ CS-SP-55155-15 15W


Power	lm/W	CCT	Flux	Beam	CRI
	72.16	3000K	1085lm		
15W	75.86	4000K	1140lm	렌즈 조절 15°~ 55°	Ra90↑
	75.34	5000K	1132lm		



	Lux in center	Beam width
2M	7939 lux	1m
4M	1985 lux	2m
6M	882 lux	3m
8M	496 lux	4m
10M	210 lux	5m

SCHILLING_ CS-SP-75155-30 30W


Power	lm/W	CCT	Flux	Beam	CRI
	77.26	3000K	2319lm		
30W	81.26	4000K	2435lm	렌즈 조절 15°~ 55°	Ra90↑
	82.64	5000K	2481lm		



	Lux in center	Beam width
2M	11354 lux	1m
4M	2838 lux	2m
6M	1262 lux	3m
8M	710 lux	4m
10M	410 lux	5m


SCHILLING_ CS-SP-85165-35 35W

Power	lm/W	CCT	Flux	Beam	CRI
	78.46	3000K	2747lm		
35W	83.46	4000K	2923lm	렌즈 조절 15°~ 55°	Ra90↑
	84.94	5000K	2975lm		



	Lux in center	Beam width
2M	14760 lux	1m
4M	3689 lux	2m
6M	1640 lux	3m
8M	922 lux	4m
10M	520 lux	5m

BEAM ANGLE INFO





KERSHAW 커쇼

CK-SP-755138-18 / CK-SP-755156-30 / CK-SP-85167-35
SPOT LIGHT



KERSHAW 커쇼 SPOT LIGHT

KERSHAW · SPOT LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.



KERSHAW AC SPOT

Kershaw 커쇼

SPOT LIGHT

CK-SP-55138-18/CK-SP-75156-30/CK-SP-85167-35



CK-SP-55138-18



CK-SP-75156-30



CK-SP-85167-35






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø55×H138
Power : 18W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø75×H156
Power : 30W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H167
Power : 35W
Input Voltage : 220V




Kershaw SPOT LIGHT

PRODUCT BASIC OPTIONS

KERSHAW_ CK-SP-55138-18 18W


Power	lm/W	CCT	Flux	Beam	CRI
	70.26	3000K	1267lm		
18W	74.16	4000K	1336lm	24°, 36°, 50°	Ra90↑
	75.25	5000K	1356lm		



Beam width	Lux in center
1m	7939 lux
2m	1985 lux
3m	882 lux
4m	496 lux
5m	210 lux

KERSHAW_ CK-SP-75156-30 30W


Power	lm/W	CCT	Flux	Beam	CRI
	78.28	3000K	2350lm		
30W	82.36	4000K	2471lm	24°, 36°, 50°	Ra90↑
	83.68	5000K	2511lm		



Beam width	Lux in center
1m	11354 lux
2m	2838 lux
3m	1262 lux
4m	710 lux
5m	410 lux

KERSHAW_ CK-SP-85167-35 35W

Power	lm/W	CCT	Flux	Beam	CRI
	79.34	3000K	2778lm		
35W	84.23	4000K	2950lm	24°, 36°, 50°	Ra90↑
	83.94	5000K	2939lm		



Beam width	Lux in center
1m	14760 lux
2m	3689 lux
3m	1640 lux
4m	922 lux
5m	510 lux

BEAM ANGLE INFO



CY YOUNG 사이영

CY-SP-55138-18 / CY-SP-75138-30 / CY-SP-85167-35
SPOT LIGHT



CY YOUNG · SPOT LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.



CY YOUNG AC SPOT

Cy Young 사이영

SPOT LIGHT

CY-SP-55138-18/CY-SP-75156-30/CY-SP-85167-35



CY-SP-55138-18



CY-SP-75156-30



CY-SP-85167-35






PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø55×H138
Power : 18W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø75×H156
Power : 30W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø85×H167
Power : 35W
Input Voltage : 220V




Cy Young SPOT LIGHT

PRODUCT BASIC OPTIONS

CY YOUNG_ CY-SP-55138-18 18W


Power	lm/W	CCT	Flux	Beam	CRI
	71.36	3000K	1286lm		
18W	74.86	4000K	1348lm	24°, 36°, 50°	Ra90↑
	76.05	5000K	1369lm		



Beam width	Lux in center
1m	7939 lux
2m	1985 lux
3m	882 lux
4m	496 lux
5m	210 lux

CY YOUNG_ CY-SP-75156-30 30W


Power	lm/W	CCT	Flux	Beam	CRI
	78.88	3000K	2366lm		
30W	82.78	4000K	2485lm	24°, 36°, 50°	Ra90↑
	83.88	5000K	2516lm		



Beam width	Lux in center
1m	11354 lux
2m	2838 lux
3m	1262 lux
4m	710 lux
5m	410 lux


CY YOUNG_ CY-SP-85167-35 35W

Power	lm/W	CCT	Flux	Beam	CRI
	80.24	3000K	2809lm		
35W	84.55	4000K	2960lm	24°, 36°, 50°	Ra90↑
	84.54	5000K	2959lm		



Beam width	Lux in center
1m	14760 lux
2m	3689 lux
3m	1640 lux
4m	922 lux
5m	520 lux

BEAM ANGLE INFO



NIEKRO 니크로

PN-SP-50145-15 / PN-SP-80160-30 / PN-SP-92160-40
SPOT LIGHT



NIEKRO · SPOT LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.



Niekro 니크로

SPOT LIGHT

PN-SP-50145-15/PN-SP-80160-30/PN-SP-92160-40






PN-SP-50145-15



PN-SP-80160-30



PN-SP-92160-40

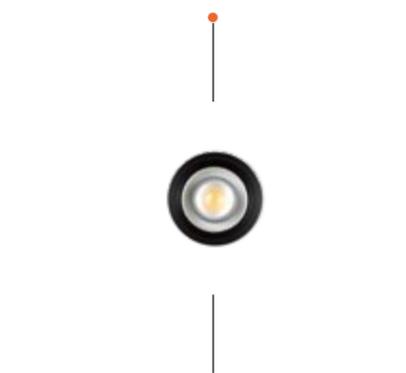
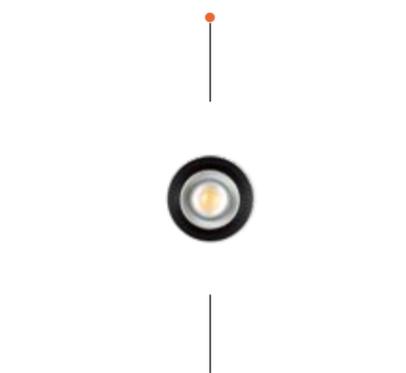



PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø50×H145
Power : 15W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø80×H160
Power : 30W
Input Voltage : 220V

Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø92×H160
Power : 40W
Input Voltage : 220V




Niekro SPOT LIGHT

PRODUCT BASIC OPTIONS

NIEKRO_ PN-SP-50145-15 15W


Power	lm/W	CCT	Flux	Beam	CRI
	70.56	3000K	1060lm		
15W	72.86	4000K	1095lm	15°, 24°, 36°	Ra90↑
	72.35	5000K	1087lm		



Beam width	Lux in center
2m	7939 lux
4m	1985 lux
6m	882 lux
8m	496 lux
10m	210 lux

NIEKRO_ PN-SP-80160-30 30W


Power	lm/W	CCT	Flux	Beam	CRI
	80.68	3000K	2423lm		
30W	83.57	4000K	2509lm	15°, 24°, 36°	Ra90↑
	84.66	5000K	2540lm		



Beam width	Lux in center
1m	11354 lux
2m	2838 lux
3m	1262 lux
4m	710 lux
5m	410 lux

NIEKRO_ PN-SP-92160-40 40W

Power	lm/W	CCT	Flux	Beam	CRI
	84.44	3000K	3377lm		
40W	88.65	4000K	3547lm	15°, 24°, 36°	Ra90↑
	88.54	5000K	3542lm		



Beam width	Lux in center
1m	14760 lux
2m	3689 lux
3m	1640 lux
4m	922 lux
5m	520 lux

BEAM ANGLE INFO





BUMGARNER 범가너

MB-SP-6067-12 / MB-SP-7578-20 / MB-SP-9088-30
SPOT LIGHT



BUMGARNER AC SPOT

BUMGARNER 범가너 SPOT LIGHT

BUMGARNER · SPOT LIGHT

Multi Spot & Down light direct beautiful space where you need, such as department store, coffeeshop, bakery, hospital, airport, hotel and gallery.
Specially, it gives luxurious effect to the detail of wonderful interior.



Bumgarner 범가너

SPOT LIGHT

MB-SP-6067-12/MB-SP-7578-20/MB-SP-9088-30






MB-SP-6067-12



MB-SP-7578-20




MB-SP-9088-30

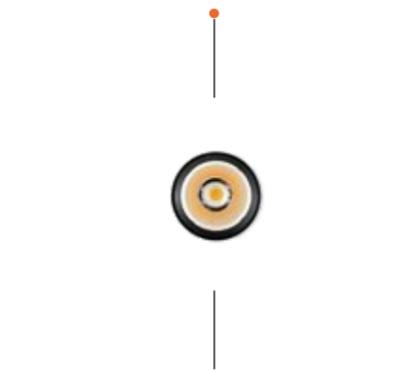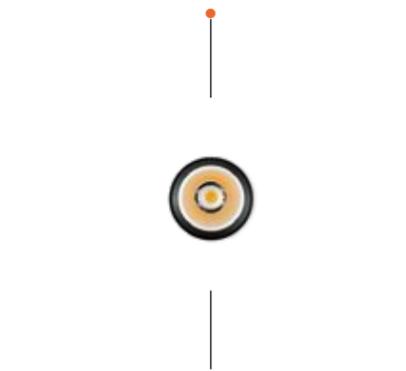


PRODUCT BASIC OPTIONS


Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø60×H67
Power : 12W
Input Voltage : 220V



Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø75×H78
Power : 20W
Input Voltage : 220V



Housing : Aluminum
Light Source : LED COB
Size(mm) : Ø90×H88
Power : 30W
Input Voltage : 220V




Bumgarner SPOT LIGHT

PRODUCT BASIC OPTIONS

BUMGARNER_ MB-SP-6067-12 12W


Power	lm/W	CCT	Flux	Beam	CRI
	70.56	3000K	848lm		
12W	72.86	4000K	875lm	24°, 36°, 50°	Ra90↑
	72.35	5000K	869lm		



Distance	Lux in center	Beam width
2M	7939 lux	1m
4M	1985 lux	2m
6M	882 lux	3m
8M	496 lux	4m
10M	210 lux	5m

BUMGARNER_ MB-SP-7578-20 20W


Power	lm/W	CCT	Flux	Beam	CRI
	71.85	3000K	1440lm		
20W	73.86	4000K	1479lm	24°, 36°, 50°	Ra90↑
	73.67	5000K	1475lm		



Distance	Lux in center	Beam width
2M	11354 lux	1m
4M	2898 lux	2m
6M	1262 lux	3m
8M	710 lux	4m
10M	410 lux	5m

BUMGARNER_ MB-SP-9088-30 30W

Power	lm/W	CCT	Flux	Beam	CRI
	79.58	3000K	2423lm		
30W	81.97	4000K	2509lm	24°, 36°, 50°	Ra90↑
	81.66	5000K	2540lm		



Distance	Lux in center	Beam width
2M	14760 lux	1m
4M	3689 lux	2m
6M	1640 lux	3m
8M	922 lux	4m
10M	520 lux	5m

BEAM ANGLE INFO





TY COBB

TC-C1-9080-03 / TC-C2-9080-03 / TC-C3-9080-03 / TC-C4-9080-03
STEP LIGHT

Ty Cobb 타이콧

STEP LIGHT

TC-C1-9080-03 / TC-C2-9080-03 / TC-C3-9080-03 / TC-C4-9080-03



TC-C1-9080-03







TC-C2-9080-03



TC-C3-9080-03



TC-C4-9080-03

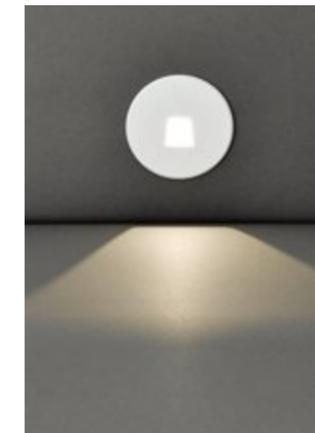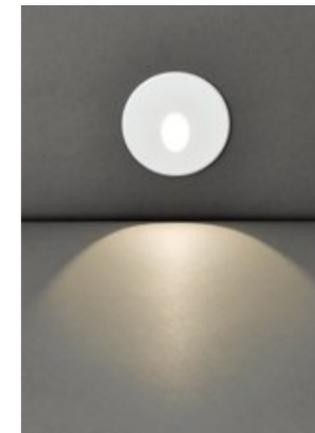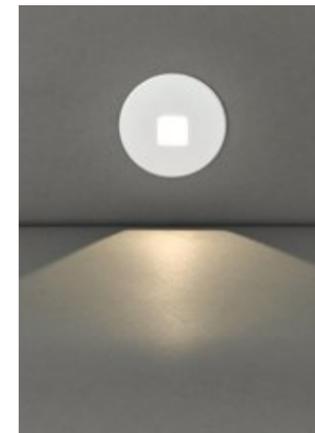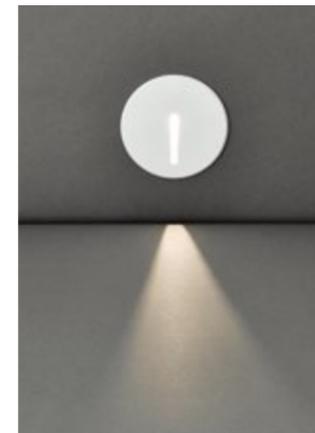

PRODUCT BASIC OPTIONS

Housing : Aluminum
Light Source : LED COB 3000K
Size(mm) : Ø90×H53
Hole : Ø80×H50
Power : 3W, IP20
Color : White, Black, Gray

Housing : Aluminum
Light Source : LED COB 3000K
Size(mm) : Ø90×H53
Hole : Ø80×H50
Power : 3W, IP20
Color : White, Black, Gray

Housing : Aluminum
Light Source : LED COB 3000K
Size(mm) : Ø90×H53
Hole : Ø80×H50
Power : 3W, IP20
Color : White, Black, Gray

Housing : Aluminum
Light Source : LED COB 3000K
Size(mm) : Ø90×H53
Hole : Ø80×H50
Power : 3W, IP20
Color : White, Black, Gray





TY COBB

TC-S1-9070-03 / TC-S2-9080-03 / TC-S3-9080-03
 TC-S4-9080-03 / TC-S5-9080-03
 STEP LIGHT

Ty Cobb 타이콧

STEP LIGHT

TC-S1-9070-03/TC-S2-9080-03/TC-S3-9080-03/TC-S4-9080-03/TC-S5-9080-03



TC-S1-9070-03



TC-S2-9080-03




TC-S3-9080-03



TC-S4-9080-03



TC-S5-9080-03

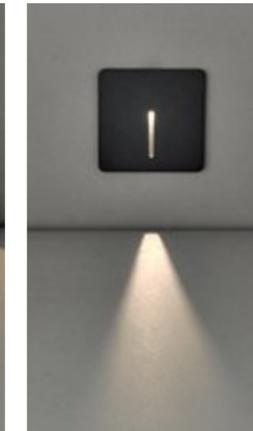

PRODUCT BASIC OPTIONS

Housing : Aluminum
 LED COB 3000K
 Size : W40xD90xH53
 Hole : W35xD70xH50
 Power : 3W, IP20
 Color : White, Black, Gray



40



35x70x50

Housing : Aluminum
 LED COB 3000K
 Size : W90xD90xH53
 Hole : W80xD80xH50
 Power : 3W, IP20
 Color : White, Black, Gray



90



80x80x50

Housing : Aluminum
 LED COB 3000K
 Size : W90xD90xH53
 Hole : W80xD80xH50
 Power : 3W, IP20
 Color : White, Black, Gray



90



80x80x50

Housing : Aluminum
 LED COB 3000K
 Size : W90xD90xH53
 Hole : W80xD80xH50
 Power : 3W, IP20
 Color : White, Black, Gray



90



80x80x50


Housing : Aluminum
 LED COB 3000K
 Size : W90xD90xH53
 Hole : W80xD80xH50
 Power : 3W, IP20
 Color : White, Black, Gray



90



80x80x50

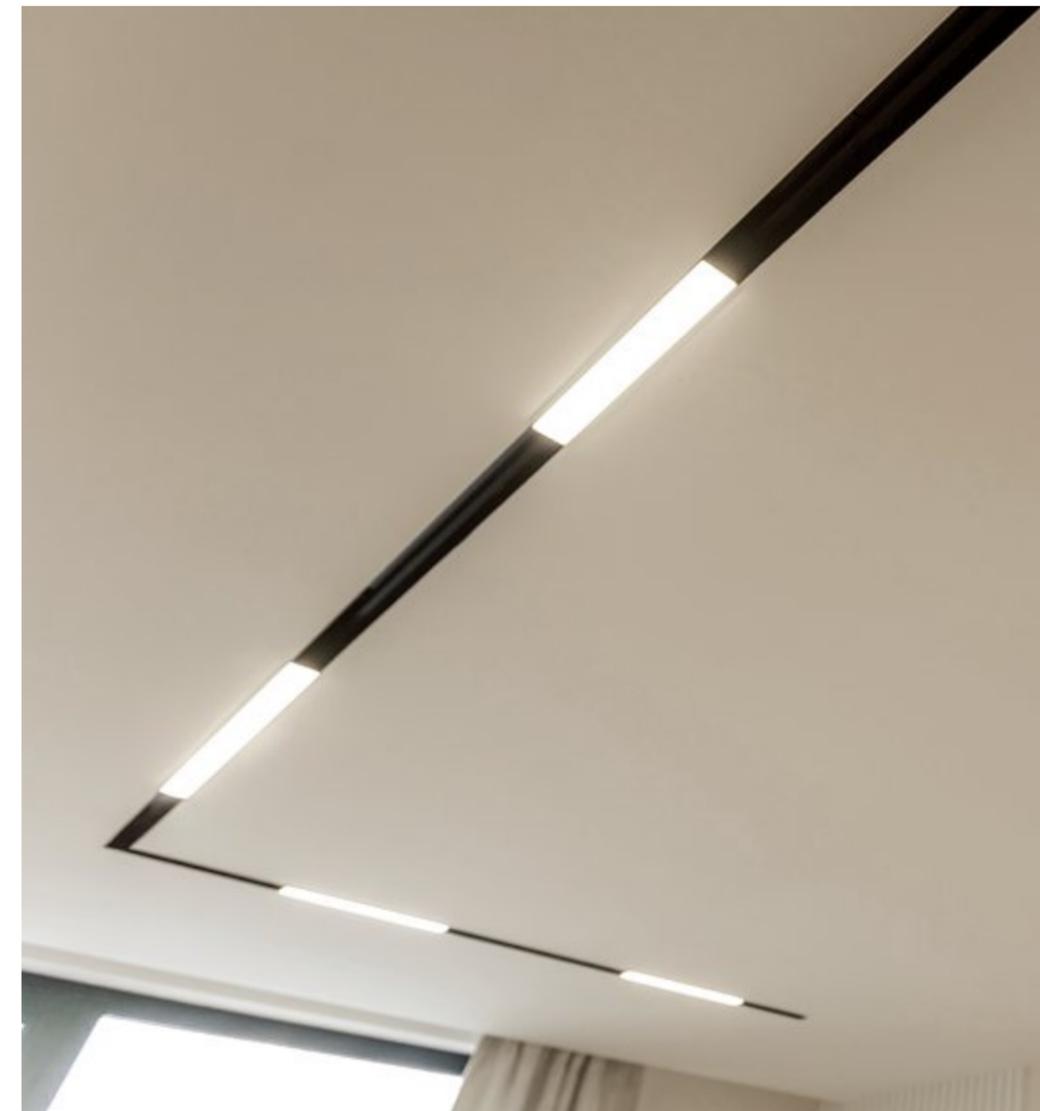

MG_01/MG_02/MG_03/MG_04/MG_05
MS_01/MS_02/MS_03/MS_04/MS_05/MS_06
PENDANT • CEILING LIGHT • DOWN LIGHT



Spot light direct beautiful space where you need, such as department store, coffee shop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.

MG_01

MG_01-06 6W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W113xD23xH44
Power : 1Wx6
Temp : 3000K, 4000K

MG_01-12 12W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W220xD23xH43
Power : 1Wx12
Temp : 3000K, 4000K

MG_01-18 18W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W328xD23xH43
Power : 1Wx18
Temp : 3000K, 4000K

MG_01-24 24W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W434xD23xH43
Power : 1Wx24
Temp : 3000K, 4000K

MG_01-30 30W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W543xD23xH43
Power : 1Wx30
Temp : 3000K, 4000K

PRODUCT BASIC OPTIONS



MG_01 Pendant



MG_01 Ceiling light



MG_01 Down light

MG_02

MG_02-06 6W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W110xD23xH83
Power : 1Wx6
Temp : 3000K, 4000K

MG_02-12 12W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W219xD23xH83
Power : 1Wx12
Temp : 3000K, 4000K

PRODUCT BASIC OPTIONS



MG_02 Pendant



MG_02 Ceiling light



MG_02 Down light

MG_03

MG_03-10 10W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W303xD23xH44
Power : 10W
Temp : 3000K, 4000K

MG_03-20 20W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W603xD23xH44
Power : 20W
Temp : 3000K, 4000K

MG_03-30 30W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W903xD23xH44
Power : 30W
Temp : 3000K, 4000K

MG_03-40 40W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W1203xD23xH44
Power : 40W
Temp : 3000K, 4000K


PRODUCT BASIC OPTIONS



MG_03 Pendant



MG_03 Ceiling light

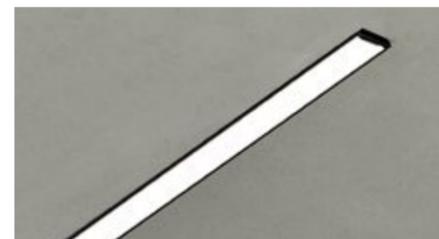

MG_03 Down light

MG_04

MG_04-10 10W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : Ø48xH105(170)
Power : 10W
Temp : 3000K, 4000K, 5000K

MG_04-20 20W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : Ø58xH155(220)
Power : 20W
Temp : 3000K, 4000K, 5000K

MG_04-30 30W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : Ø68xH155(221)
Power : 30W
Temp : 3000K, 4000K, 5000K

PRODUCT BASIC OPTIONS



MG_04 Pendant




MG_04 Ceiling light



MG_04 Down light


MG_05

MG_05-06 6W




Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size(mm) : W124xD34xH72
Power : 1Wx6
Temp : 3000K, 4000K

MG_05-12 12W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size(mm) : W232xD34xH72
Power : 1Wx12
Temp : 3000K, 4000K

MG_05-18 18W

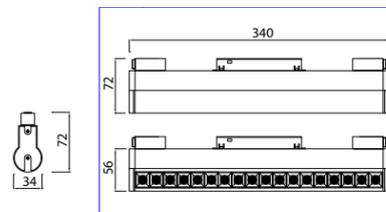

Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size(mm) : W340xD34xH72
Power : 1Wx18
Temp : 3000K, 4000K

PRODUCT BASIC OPTIONS



MG_05-06



MG_05-12



MG_05-18

MG Accessories

마그네틱 레일부속, 컨버터

PRODUCT BASIC OPTIONS




T자




X자



WALL



ㄱ자



직부형 ㄱ자 연결부속



일자 전원 연결대

ㄱ자 전원연결


T자 전원연결

전원연결

일자 전원 연결 소



컨버터

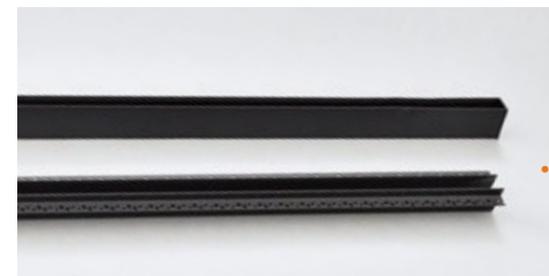

레일(매입형/직부형)

MS_01



Spot light direct beautiful space where you need, such as department store, coffee shop, bakery, hospital, airport, hotel and gallery. Specially, it gives luxurious effect to the detail of wonderful interior.




MS_01-10 3000K



MS_01-10 4000K

MS_01

MS_01-10 10W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W223xD32xH60
Power : 10W
Temp : 3000K, 4000K

PRODUCT BASIC OPTIONS



MS_01-10



MS_01-10



MS_01-10

MS_02

MS_02-10 10W




Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PC/Lens-Pmma
Light Source : LED COB
Size : W300xD32xH20
Power : 10W
Temp : 3000K, 4000K

MS_02-20 20W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PC/Lens-Pmma
Light Source : LED COB
Size : W612xD32xH20
Power : 20W
Temp : 3000K, 4000K

MS_02-30 30W

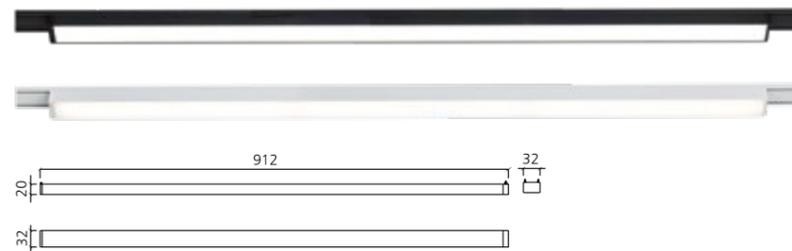

Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PC/Lens-Pmma
Light Source : LED COB
Size : W912xD32xH20
Power : 30W
Temp : 3000K, 4000K

PRODUCT BASIC OPTIONS



MS_02-10



MS_02-20



MS_02-30

MS_03

MS_03-12 12W



PRODUCT BASIC OPTIONS

MS_03-06 6W

Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PC/Lens-Pmma
Light Source : LED COB
Size : W122xD26xH24
Power : 6W
Temp : 3000K, 4000K

MS_03-12 12W

Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PC/Lens-Pmma
Light Source : LED COB
Size : W230xD26xH24
Power : 12W
Temp : 3000K, 4000K

MS_03-18 18W

Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PC/Lens-Pmma
Light Source : LED COB
Size : W338xD26xH24
Power : 18W
Temp : 3000K, 4000K

MS_03-24 24W

Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PC/Lens-Pmma
Light Source : LED COB
Size : W445xD26xH24
Power : 24W
Temp : 3000K, 4000K

MS_03-30 30W

Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PC/Lens-Pmma
Light Source : LED COB
Size : W555xD26xH24
Power : 30W
Temp : 3000K, 4000K

PRODUCT BASIC OPTIONS



MS_03-12




MS_03-12



MS_03-12


MS_04

MS_04-10 10W




Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : Ø45xH110
Power : 10W
Temp : 3000K, 4000K, 5000K

MS_04-20 20W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : Ø55xH130
Power : 20W
Temp : 3000K, 4000K, 5000K

MS_04-30 30W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : Ø65xH155
Power : 30W
Temp : 3000K, 4000K, 5000K

PRODUCT BASIC OPTIONS



MS_04 SPOT



MS_04 SPOT



MS_04 SPOT

MS_05


MS_05-06 6W



MS_05-06 6W_AD
(각도 조절)



MS_05-06 6W




Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : Ø75xH75
Power : DC 6W
Temp : 3000K, 4000K, 5000K

MS_06

CEILING LIGHT

MS_06-06 6W



Housing : Aluminum, Steel,
AL-Die Casting
Reflector : PMMA-Lens
Light Source : LED COB
Size : W122xD26xH55
Power : DC 6W
Temp : 3000K, 4000K, 5000K

PRODUCT BASIC OPTIONS



MS_06-06 Ceiling light



MS_05-06 Ceiling light



MS_05-06 Ceiling light

MS SLIM Accessories

마그네틱 슬림 부품

MS SLIM Accessories 부속



슬림 7자 연결



슬림십자 연결



슬림일자 연결



슬림T자 연결



7자 전원연결



일자 연결



전원 연결

MS SLIM 안정기



안정기



안정기



안정기

MS RAIL 레일



MS레일_슬림 매입형




MS레일_슬림 직부형



노출 직부형



트림리스



트림리스